



DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
BOARD AND CODE ADMINISTRATION DIVISION

NOTICE OF ACCEPTANCE (NOA)

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION

11805 SW 26 Street, Room 208
Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599

www.miamidade.gov/economy

Tremco CPG Inc. (OH)
3735 Green Road
Beachwood, OH 44122

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER-Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: NUDURA Insulated Concrete Form Wall System

APPROVAL DOCUMENT: Drawing No. **MD-NUD 0506**, titled "NUDURA® Insulated Concrete Form (ICF) System", sheet 1 of 1, prepared by Tremco CPG Inc., dated 06/21/2011, with revision dated 07/18/2023, signed and sealed by Robert Nieminen, P. E. on 07/16/2025, bearing the Miami-Dade County Product Control renewal stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: None

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, Columbus, GA and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **renews NOA # 23-1030.02** and consists of this page 1, evidence pages E-1, E-2 and E-3, as well as approval document mentioned above.

The submitted documentation was reviewed by **Carlos M. Utrera, P.E.**



07/15/26

NOA No 26-0514.09
Expiration Date: July 20, 2027
Approval Date: July 23, 2026
Page 1

NOTICE OF ACCEPTANCE: EVIDENCE PAGE

1. Evidence submitted under previous NOA's

A. DRAWING "Submitted under NOA # 17-1026.07"

1. Drawing No. **MD-NUD 0911**, titled "NUDURA® Integrated Building Technology Insulated Concrete Forming System", sheet 1 of 1, prepared by NUDURA Integrated Building Technology, dated 06/21/2011, with revision "11092101" dated 04/28/2016, signed and sealed by Hermes F. Norero, P.E.

B. TEST "Submitted under NOA # 05-0330.02"

<u>Laboratory Report</u>	<u>Test</u>	<u>Date</u>	<u>Signature</u>
<u>BASF and NOVA EPS:</u>			
1. SGS 110170	ASTM C 1338	06/29/04	Dale E. Holloway
<u>BASF EPS:</u>			
1. RAD-3561	ASTM C 578(ASTM C303)	01/10/05	Michael L. Zieman, P.E.
2. RAD-3561	ASTM C 578(ASTM D1621)	01/10/05	Michael L. Zieman, P.E.
3. RAD-3561	ASTM C 578(ASTM C203)	01/10/05	Michael L. Zieman, P.E.
4. RAD-3561	ASTM C 578(ASTM D2863)	01/10/05	Michael L. Zieman, P.E.
5. RAD-3561	ASTM C 578(ASTM C518)	01/10/05	Michael L. Zieman, P.E.
6. RAD-3561	ASTM C 578(ASTM E96)	01/10/05	Michael L. Zieman, P.E.
7. RAD-3561	ASTM C 578(ASTM C272)	01/10/05	Michael L. Zieman, P.E.
8. RAD-3561	ASTM C 578(ASTM D2126)	01/10/05	Michael L. Zieman, P.E.
9. UL-01NK44301 (Flame Spread & Smoke Developed)		02/14/02	R.F. Oleck, P.E.
10. SGSUS 092897	ASTM D1929	11/28/88	R.F. Oleck, P.E.
<u>"Submitted under NOA # 02-0919.09"</u>			
<u>NOVA Chemicals EPS:</u>			
1. RAD-2884	ASTM C 578ASTM C303	09/01/01	J. Donald Waldman
2. RAD-2884	ASTM C 578ASTM C518	09/01/01	J. Donald Waldman
3. RAD-2884	ASTM C 578 ASTM D1621	09/01/01	J. Donald Waldman
4. RAD-2884	ASTM C 578-00 (ASTM C203)	09/01/01	J. Donald Waldman
5. RAD-2884	ASTM C 578-00 (ASTM E96)	09/01/01	J. Donald Waldman.
6. RAD-2884	ASTM C 578-00 (ASTM C272)	09/01/01	J. Donald Waldman
7. RAD-2884	ASTM C 578-00 (ASTM D2863)	09/01/01	J. Donald Waldman
8. RAD-2884	ASTM C 578-00 (ASTM D2126)	09/01/01	J. Donald Waldman
9. UL-016844006 (Flame Spread & Smoke Developed)		02/14/01	R.F. Oleck, P.E.
10. SGSUS 092897	ASTM D1929	11/28/88	R.F. Oleck, P.E.
<u>NUDURA Reinforcing Web:</u>			
1. ITS-3016348	ASTM D638	03/26/02	Cameron Robison, P.E.
2. ITS-3016348	ASTM D1929	03/26/02	Cameron Robison, P.E.
3. ITS-3016348	ASTM D635	03/26/02	Cameron Robison, P.E.
4. ITS-3016348	ASTM D2843	03/26/02	Cameron Robison, P.E.



Carlos M. Utrera, P.E.
Product Control Examiner
NOA No 26-0514.09
Expiration Date: July 20, 2027
Approval Date: July 23, 2026

NOTICE OF ACCEPTANCE: EVIDENCE PAGE

C. CALCULATION

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. UL material Certification # **BRYX2.R4775** per ANSI/UL 723 (ASTM E84) issued to NOVA Chemical Inc. for their foam plastic component.
2. UL material Certification # **BRYX2.R10302** per ANSI/UL 723 (ASTM E84) issued to Styrochem Canada Ltd. for their foam plastic component.

F. STATEMENTS

1. Distributor agreement dated 01/05/2012. ***“Submitted under NOA # 11-0720.02”***
2. Certificate of incorporation dated 11/30/2016. ***“Submitted under NOA # 17-1026.07”***
3. Statement letter of code conformance to the 6th edition (2017) FBC and of no financial interest issued by Building Drops, Inc., dated 09/28/2017, signed and sealed by Hermes F. Norero, P.E.



Carlos M. Utrera, P.E.
Product Control Examiner
NOA No 26-0514.09
Expiration Date: July 20, 2027
Approval Date: July 23, 2026


NOTICE OF ACCEPTANCE: EVIDENCE PAGE

- 2. Evidence submitted under NOA # 21-0203.08 and new**
- A. DRAWING**
1. Drawing No. **MD-NUD 0506**, titled “NUDURA® Insulated Concrete Form (ICF) System”, sheet 1 of 1, prepared by Tremco CPG Inc., dated 06/21/2011, with revision “06050501” dated 07/18/2023, signed and sealed by Robert Nieminen, P. E.
- B. TEST**
1. None.
- C. CALCULATION**
1. None.
- D. QUALITY ASSURANCE**
1. Miami-Dade Department of Regulatory and Economic Resources (RER).
- E. MATERIAL CERTIFICATIONS**
1. None.
- F. STATEMENTS**
1. Verification testing letter, dated 07/08/2026, signed by Justin Shores.
 2. Statement letter of code conformance to the 8th edition (2023) of the FBC, issued by Tremco CPG Inc., dated 10/10/2023, signed and sealed by Robert Nieminen, P. E.
 3. State of Georgia certificate of merger of Nudura Systems, Inc. into Tremco Acquisition, LLC, dated 02/25/2022, signed by Brad Raffensperger, Secretary of State.
 4. State of Delaware certificate of conversion from Tremco Acquisition, LLC to Tremco CPG Inc., dated 02/22/2022, signed by Jeffrey W. Bullock, Secretary of State.
 5. Statement letter of code conformance to the 7th edition (2020) FBC and of no financial interest issued by Building Drops, Inc., dated 12/01/2020, signed and sealed by Hermes F. Norero, P.E. *“Submitted under NOA # 21-0203.08”*



Carlos M. Utrera, P.E.
Product Control Examiner
NOA No 26-0514.09
Expiration Date: July 20, 2027
Approval Date: July 23, 2026

The following pages in this document were submitted by the manufacturer (third party) to represent the product being approved and establish the limits of use. The pages may include technical drawings, schematics and installation details.

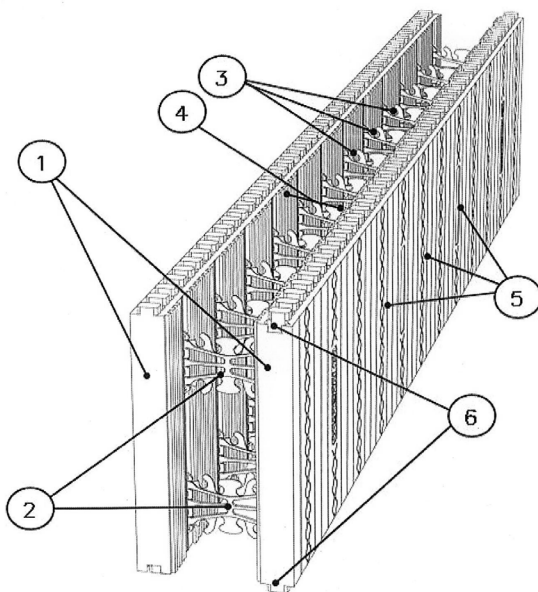

Form Component Legend

1. Expanded Polystyrene Foam Panels
2. Patented Hinged Folding Polypropylene Webs
3. Reinforcing Steel Capture Lugs
4. Concrete Core
5. Fastening Strip Identifying Marks
6. Reversible Top and Bottom Panel Interlocks

NOTES:

This approval pertains to the insulation properties of Nudura® Insulating Concrete Form (ICF) System only. This approval does not imply approval of the concrete used within the form system or the structural and/or forming capacity of the material and the system. IMPORTANT: PROTECT PRODUCT FROM UV EXPOSURE BY ENSURING ANY EXTERIOR EXPOSED SURFACE IS EITHER FINAL FINISHED OR CLADDED WITH TEMPORARY UV PROTECTION WITHIN 12 MONTHS OF INSTALLATION. START.

Nudura® Insulating Concrete Form (ICF) System

DESCRIPTION

"Nudura® Insulating Concrete Form (ICF) System" is an insulating concrete form system which features 2 parallel wall panels formed of Type II expanded polystyrene foam (as supplied from current ICC-ES approved resin manufacturers) cross linked at 8 inches o/c with foldable high-density polypropylene webs (manufactured by Tremco CPG Inc.) with fastening strips embedded in the foam. Each panel measures 8 feet in length, 18 inches in height by 2 5/8" in thickness. Once unfolded and set into position, the units formed by the panels can be stacked together to form nominal wall cavity thicknesses of 4", 6", 8", 10" and 12". The cavity can then be reinforced with steel reinforcing bars and filled with concrete to form a structural monolithic reinforced concrete wall. After the concrete has hardened, the forms remain in place as an integral part of the wall to serve as insulation on both the inside and outside of the concrete wall. The embedded fastening strips provide strapping for fastening finishing materials both inside and outside of the insulation. The system as a concrete forming system shall comply with, ASTM E2634 & ASTM C578 and the concrete walls shall comply with ACI 318 or PCA 100. The properties of the EPS are listed below: (IMPORTANT: SEE INSET NOTES BELOW LEFT)

Product Properties – Current ICC-ES Resins & Tremco/Nudura® Polypropylene Webs

Material Property	Standard	Limit	Result	Status
ALL APPROVED EPS RESIN		Max./Min.		
Thermal Transmission	ASTM C518-21	Min. R4.00/in	Min. R4.16/in	Complies
Flame Spread Rating	ASTM E84-21A	Index <10	5	Complies
Smoke Developed Index	ASTM E84-21A	Index < 450	190	Complies
Water Vapor Permeance	ASTM E96M-22A	Max. 3.5 Perms	2.6 Perms	Complies
Water Absorption	ASTM C272M-18	Max. 3%	2.26%	Complies
Density	ASTM C303-21	1.35 pcf	1.35 pcf	Complies
Compressive Properties	ASTM D1621-16	Min. 15.0 psi	20.64 psi	Complies
Flexural Strength	ASTM C203-22	Min. 35.0 psi	42.7 psi	Complies
Limiting Oxygen Index	ASTM D2863-19	Min. 24%	>24%	Complies
Thermal & Humid Aging	ASTM D2126-20	2.0 % Max. Variance	.27% Max	Complies
Fungi Resistance	ASTM C1338-19R22	No Growth	No Growth	Complies
Self Ignition Temperature	ASTM D1929-20	Min. 650°F	896°F	Complies
POLYPROPYLENE WEBS				
Self Ignition Temperature	ASTM D1929-20	Min. 650°F	734°F	Complies
Smoke Density Rating	ASTM D2843-22	Max. 75%	25.5%	Complies
Rate of Burning	ASTM D635-22	Max. 1 1/2"	3/8"	Complies


PRODUCT RENEWED
as complying with the Florida
Building Code
NOA-No. **26-0514.09**

Expiration Date **07/20/2027**

By 
Miami-Dade Product Control

B
FOR OFFICE USE ONLY:

VALIDATION STAMP:
REGISTERED FLORIDA ENGINEER



Robert Nieminen, P.E.
President

NEMO ETC LLC
353 Christian Street
Unit 13
Oxford, CT 06478

Phone: (203) 262 9245, ext. 103
Email: RobertN@nemoetc.com

MANUFACTURER:



Tremco CPG Inc.
3735 Green Road,
Beachwood, OH 44122

Phone: (866) 468-6299
Email: tech@nudura.com

Title:

**Nudura® Insulating Concrete Form (ICF)
System**

Revision No.

06050501

Revision Date:

2023-07-18

Drawing No.

**APPROVAL DOCUMENT
MD-NUD 0506**

Drawn By:

KR/KS

Date:

JUN 21/2011

Sheet No.

1 of 1