



DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
BOARD AND CODE ADMINISTRATION DIVISION

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION
11805 SW 26 Street, Room 208
Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599
www.miamidade.gov/economy

NOTICE OF ACCEPTANCE (NOA)

LAPOLLA Industries, Inc.
15402 Vantage Parkway East
Suite 322
Houston, TX 77032

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER - Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code including the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: Spray Polyurethane Foam – Foam Lok LPA 2500, 2800, 2800-4G, and 3000 over LWC Decks

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA revises NOA# 18-0807.15 and consists of pages 1 through 6.
The submitted documentation was reviewed by Alex Tigera.



NOA No.: 20-0902.07
Expiration Date: 09/29/25
Approval Date: 10/01/20
Page 1 of 6

ROOFING COMPONENT APPROVAL

<u>Category:</u>	Roofing
<u>Sub-Category:</u>	Spray Applied Polyurethane Roof System
<u>Materials:</u>	Polyurethane
<u>Deck Type</u>	Wood
<u>Maximum Design Pressure</u>	-105 psf

TRADE NAMES OF PRODUCTS MANUFACTURED OR LABELED BY APPLICANT:

<u>Product</u>	<u>Dimensions</u>	<u>Test Specifications</u>	<u>Product Description</u>
Foam-LOK LPA 2500	2.5 lbs/ft ³ density	TAS 110	Polyurethane spray applied foam that utilizes an HFC blowing agent intended for roofing applications.
Foam-LOK LPA 2800	2.8 lbs/ft ³ density	TAS 110	Polyurethane spray applied foam that utilizes an HFC blowing agent intended for roofing applications.
Foam-LOK LPA 2800-4G	2.8 lbs/ft ³ density	TAS 110	Polyurethane spray applied foam that utilizes a new HFC blowing agent intended for roofing applications.
Foam-LOK LPA 3000	3.0 lbs/ft ³ density	TAS 110	Polyurethane spray applied foam that utilizes an HFC blowing agent intended for roofing applications.
Therm-O-Flex TF 1000 Series Elastomeric Roof Coating	N/A	ASTM D6083	A premium quality, fluid applied elastomeric roof coating.
RCS-5000 Series Restoration Coatings	N/A	ASTM D6083	A premium quality, fluid applied elastomeric roof coating.
Therm-O-Prime	N/A		A single component, water soluble acrylic emulsion primer to prepare Galvanized Metal, Concrete, Asphalt Substrates and Scarified Foam for new SPF installations.



NOA No.: 20-0902.07
Expiration Date: 09/29/25
Approval Date: 10/01/20
Page 2 of 6

TRADE NAMES OF PRODUCTS MANUFACTURED BY OTHERS:

<u>Product</u>	<u>Dimensions</u>	<u>Test Specifications</u>	<u>Product Description</u>	<u>Manufacturer</u>
Any Miami-Dade County Approved Roof Coating	N/A	N/A	As Required by Miami-Dade County PCA	Roof coating for application over polyurethane spray applied foam.
Perma Glas-Mesh PGM 242	Various	N/A	A reinforcing inorganic, woven glass fiber fabric, coated with organic resin coating membrane.	Saint-Gobain Technical Fabrics
Securock	.5"x 4'x 8'	N/A	Gypsum Board	US Gypsum
Olympic #15 XHD Fastener and 3" Plate	3" round Various lengths	N/A	Insulation fastener and stress plate for steel and wood decks	OMG, Inc.
Separator Sheet	Various	N/A	Vapor Barrier to prevent migration of moisture from LWC deck to insulation boards.	Generic

EVIDENCE SUBMITTED:

<u>Test Agency</u>	<u>Test Identifier</u>	<u>Test Name/Report</u>	<u>Date</u>
PRI Construction Materials Technologies	LPII-007-02-01	TAS 110	01/27/10
	LPII-008-02-01	TAS 110	01/27/10
	LPII-005-02-01	TAS 110	06/12/07
	LPII-031-02-01	TAS 110/ TAS 114-D	04/06/18
	LPII-031-02-02.01	TAS 110	06/29/18
PRI Asphalt Technologies	LPII- 002-02-01	ASTM D 6083/TAS 114-H	10/19/05
Underwriters Laboratories	07NK08120	UL 790	07/16/07
	R14353	Fire Classification	06/26/05
Factory Mutual Research Corp.	3023796	Class 4470	10/02/05
Atlantic & Caribbean Roof Consulting, LLC	09-016	TAS 114-J	10/19/09

DECK STRESS ANALYSIS CALCULATIONS/REPORTS

<u>Engineer/Agency</u>	<u>Identifier</u>	<u>Assemblies:</u>	<u>Date</u>
Randall Fowler, P.E.	Letter	C	09/30/15



APPROVED ASSEMBLIES:

Deck Type 4I: Lightweight Concrete, Insulated

Deck Description: **Concrecel Lightweight Concrete** with min. compressive strength of. 250-300 psi; ¼” thick slurry is poured over the steel or concrete deck. Min 1” thick, 1.0 pcf of Insulfoam EPS board is placed into the slurry, followed by a minimum 2” thick top coat of lightweight concrete.

System Type C: Separator Sheet loose laid with insulation mechanically fastened through LWC to steel deck. SPUF applied over insulaion board .

Deck: Minimum 22 ga. 50ksi, 1.5” type B G-90 Steel Deck with maximum 6’ spans secured to the deck supports with Tek 5 SD screws 6” o.c. (every rib). Side laps secured with #10 self drilling screws at 12” o.c.

This Tested Assembly has been analyzed for allowable deck stress. See Evidence Submitttd Table.

All General and System Limitations apply.

One layer of the following insulation.

<u>Insulation Layer</u>	<u>Insulation Fasteners</u>	<u>Fastener Density/ft2</u>
Securock Minimum .5” thick	# 15 OMG XHD screw with 3” Metal plates	1:2

Separator Sheet: Required between the rigid insulation boards and the lightweight insulating concrete deck. Install one of the following products loose laid: 20 mil polyethylene sheet, red rosen paper or any ASTM D-226 Type II base sheet.

Surface Preparation: Any metal surfaces should be primed with Therm-O-Prime according to LAPOLLA Industries, Inc. and coating manufacturers’ recommendations. Primer shall be thoroughly cured prior to application.

For ferrous metal, remove loose rust and unsound primer from shop-primed iron and steel surfaces by scraping, wire brushing or sandblasting. Prime according to LAPOLLA Industries, Inc. and coating manufacturer’s recommendations. For non-ferrous metals, clean and prime aluminum, copper and stainless steel surfaces as recommended by LAPOLLA Industries, Inc.

Primers shall be applied in accordance with their manufacturer’s instructions. All primers must be thoroughly dry and cured prior to foam application.

Polyurethane Foam Application: The polyurethane foam shall be applied uniformly over the entire surface of the insulation at the specified thickness in compliance with the requirements set forth in Roofing Application Standard RAS 109, But in no case shall it be less than 1”. The sprayed polyurethane foam shall be feathered at the edges to produce a smooth transition.



**Protective Coating
Application:**

Shall apply a Miami-Dade County approved roof coating with a current NOA applied in accordance with the guidelines listed in the NOA.


Polyurethane foam surface shall be free of moisture, dust, debris, oils, tars, grease or other materials that will as recommended by LAPOLLA Industries, Inc. impair adhesion of the protective coverings. Any damage or defects to the polyurethane foam surface shall be repaired prior to the coating application. The coating shall be applied the same day as the foam when possible. If more than 72 hours elapse prior to the application of the coatings, the polyurethane foam shall be inspected for UV degradation.

**Maximum Design
Pressure:**

-105 psf; (See General Limitation #7.)



TABLE 1
AMBIENT HUMIDITY APPLICATION LIMITS
SPRAYED POLYURETHANE FOAM

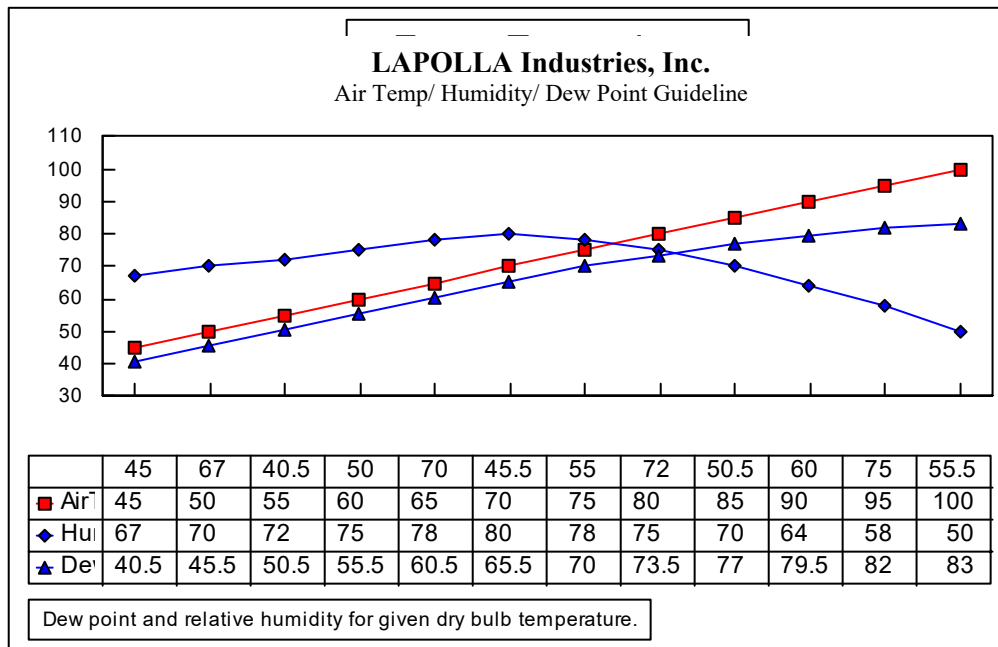

GENERAL LIMITATIONS:

1. Fire classification is not part of this acceptance, refer to a current Approved Roofing Materials Directory for fire ratings of this product
2. Spray polyurethane foam shall not be sprayed when ambient temperature is within 5 degrees of the dew point. Ambient humidity applications limits shall be as listed in Table 1 herein. Contractor shall monitor and record environmental conditions in the Job Log in compliance with RAS 109. Job Log shall be maintained at the job site and accessible to The Building Official.
3. Flashings and waterproof coverings for expansion joints shall be of compatible materials and in accordance with LAPOLLA Industries, Inc. published literature.
4. Miscellaneous materials such as adhesives, elastomeric caulking compounds, metal, vents and drains shall be a composite part of the roof system and shall be compatible with the foam and coating.
5. All standard panel sizes are acceptable for mechanical attachment. When applied in approved asphalt, panel size shall be 4' x 4' maximum.
6. Fastener spacing for insulation attachment is based on a Minimum Characteristic Force (F') value of 275 lbf., as tested in compliance with Testing Application Standard TAS 105. If the fastener value, as field-tested, are below 275 lbf. Insulation attachment shall not be acceptable.
7. Perimeter and corner areas shall comply with the enhanced uplift pressure requirements of these areas. Fastener densities shall be increased for both insulation and base sheet as calculated in compliance with Roofing Application Standard RAS 117. Calculations prepared, signed and sealed by a Florida registered Professional Engineer, Registered Architect, or Registered Roof Consultant **(When this limitation is specifically referred within this NOA, General Limitation #9 will not be applicable.)**
8. All attachment and sizing of perimeter nailers, metal profile, and/or flashing termination designs shall conform with Roofing Application Standard RAS 111 and applicable wind load requirements.
9. The maximum designed pressure limitation listed shall be applicable to all roof pressure zones (i.e. field, perimeters, and corners). Neither rational analysis, nor extrapolation shall be permitted for enhanced fastening at enhanced pressure zones (i.e. perimeters, extended corners and corners). **(When this limitation is specifically referred within this NOA, General Limitation #7 will not be applicable.)**

END OF THIS ACCEPTANCE