



DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
BOARD AND CODE ADMINISTRATION DIVISION
NOTICE OF ACCEPTANCE (NOA)

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION
11805 SW 26 Street, Room 208
Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599
www.miamidade.gov/economy

JB Garage Door, Inc.
12195 NW 98th Avenue
Hialeah Gardens, FL 33018

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER-Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Models 724/720 Steel Sectional Garage Door up to 18'-2" Wide x 22' High

APPROVAL DOCUMENT: Drawing No. **99-03**, titled "Steel Overhead Garage Door", sheets 1 through 5 of 5, dated 02/01/1999 with last revision dated 07/10/2020, prepared by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E., bearing the Miami-Dade County Product Control renewal stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

LABELING: A permanent label with the manufacturer's name or logo, manufacturing address, model number, the positive and negative design pressure rating, indicate impact rated if applicable, installation instruction drawing reference number, approval number (NOA), the applicable test standards, and the statement reading 'Miami-Dade County Product Control Approved' is to be located on the door's side track, bottom angle, or inner surface of a panel.

LIMITATION: This door has not been tested for air infiltration.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **renews NOA # 20-0819.05** and consists of this page 1 and evidence pages E-1, E-2 and E-3, as well as approval document mentioned above.

The submitted documentation was reviewed by **Carlos M. Utrera, P.E.**



NOA No. 22-0215.01
Expiration Date: July 22, 2027
Approval Date: April 21, 2022
Page 1

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. Evidence submitted in previous NOAs

A. DRAWINGS

1. Drawing No. **99-03**, titled “Steel Overhead Garage Door”, sheets 1 through 5 of 5, dated 02/01/1999, with revision G dated 01/06/2017, prepared by Al-Farooq Corporation, signed and sealed by Javad Ahmad, P.E.

B. TESTS “Submitted under NOA # 13-0212.04”

1. Test report on Large Missile Impact Test per FBC, TAS 201-94 and Cyclic Wind Pressure Loading Test per FBC, TAS 203-94 of a Model 724 24 ga Sectional Garage Door, prepared by Hurricane Engineering & Testing, Inc., Test Report No. **HETI-13-4077**, dated 07/16/2013, signed and sealed by Rafael E. Droz-Seda, P.E.
2. Test report of Uniform Static Air Pressure Test, Loading and Forced Entry Resistance Test per FBC, TAS 202-94 of a Model 724 24 ga Sectional Garage Door, prepared by Hurricane Engineering & Testing, Inc., Test Report No. **HETI-13-4076**, dated 07/16/2013, signed and sealed by Rafael E. Droz-Seda, P.E.
3. Test report of Tensile Test per ASTM E8 of a Sectional Garage Door Skin, prepared by Hurricane Engineering & Testing, Inc., Test Report No. **HETI-13-T394**, dated 09/04/2013, signed and sealed by Rafael E. Droz-Seda, P.E.

“Submitted under NOA # 99-0402.02”

4. Test report of Large Missile Impact Test per FBC, TAS 201-94 and Cyclic Wind Pressure Test per FBC, TAS 203 on Sectional Commercial Door, prepared by Hurricane Engineering & Testing, Inc., Report No. **HETI 98-770**, dated 12/10/1998, signed and sealed by H. M. Medina, P.E.
5. Test report of Uniform Static Air Pressure Test and Forced Entry Resistance Test per FBC, TAS 202-94 on Sectional Commercial Door, prepared by Hurricane Engineering & Testing, Inc., Report No. **HETI 98-763**, dated 11/19/1998, signed and sealed by H. M. Medina, P.E.

C. CALCULATIONS “Submitted under NOA # 14-1014.09”

1. Anchoring verification calculations prepared by Al-Farooq Corporation, dated 09/23/2014, signed and sealed by Javad Ahmad, P.E.

“Submitted under NOA # 09-0218.11”

2. Anchoring verification calculations prepared by Al-Farooq Corporation, complying with F.B.C 2007, dated 01/21/2009, signed and sealed by Humayoun Farooq, P.E.

D. QUALITY ASSURANCE

- . Miami-Dade Department of Regulatory and Economic Resources (RER).



Carlos M. Utrera, P.E.
Product Control Examiner
NOA No. 22-0215.01
Expiration Date: July 22, 2027
Approval Date: April 21, 2022

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

E. MATERIAL CERTIFICATIONS

1. Notice of Acceptance No. **17-0221.06**, issued to Insulfoam, LLC, for their Insulfoam Expanded Polystyrene Insulation, expiring on 11/29/2022.
2. Notice of Acceptance No. **16-1108.04**, issued to Dyplast Products, LLC, for their Dyplast ISO-C1 Polyisocyanurate Insulation, expiring on 01/11/2022.
3. Notice of Acceptance No. **15-1203.04**, issued to Cellofoam North America Inc, for their Expanded Polystyrene Block Insulation, expiring on 02/24/2021.

F. STATEMENTS

1. Statement letter of code conformance to 5th edition (2014) FBC and of no financial interest issued by Al-Farooq Corporation, dated 01/10/2017, signed and sealed by Javad Ahmad, P.E.
“Submitted under NOA # 13-0212.04”
2. Statement letter of code conformance to 2010 FBC issued by Al-Farooq Corporation, dated 02/07/2013, signed and sealed by Javad Ahmad, P.E.

2. Evidence submitted under NOA # 17-1018.16

A. DRAWINGS

1. Drawing No. **99-03 Rev H**, titled “Steel Overhead Garage Door”, sheets 1 through 5 of 5, dated 02/01/1999 and last revised on OCT 09, 2017, sheets 1 through 5 of 5, prepared by Al-Farooq Corporation, signed and sealed by Javad Ahmad, P.E.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS

1. Statement letter of conformance to FBC 2014 (5th Edition) and FBC 2017 (6th Edition), prepared by Al Farooq Corporation, dated 10/09/17, signed and sealed by Javad Ahmad, P.E.



Carlos M. Utrera, P.E.
Product Control Examiner
NOA No. 22-0215.01
Expiration Date: July 22, 2027
Approval Date: April 21, 2022

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

3. Evidence submitted under NOA # 20-0819.05

A. DRAWINGS

1. Drawing No. **99-03**, titled “Steel Overhead Garage Door”, sheets 1 through 5 of 5, dated 02/01/1999 with last revision dated 07/10/2020, prepared by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS


1. None.

F. STATEMENTS

1. Statement letter of code conformance to the 6th edition (2017) and 7th edition (2020) FBC and of no financial interest issued by Al-Farooq Corporation, dated 07/15/2020, signed and sealed by Jalal Farooq, P.E.



Carlos M. Utrera, P.E.
Product Control Examiner
NOA No. 22-0215.01
Expiration Date: July 22, 2027
Approval Date: April 21, 2022

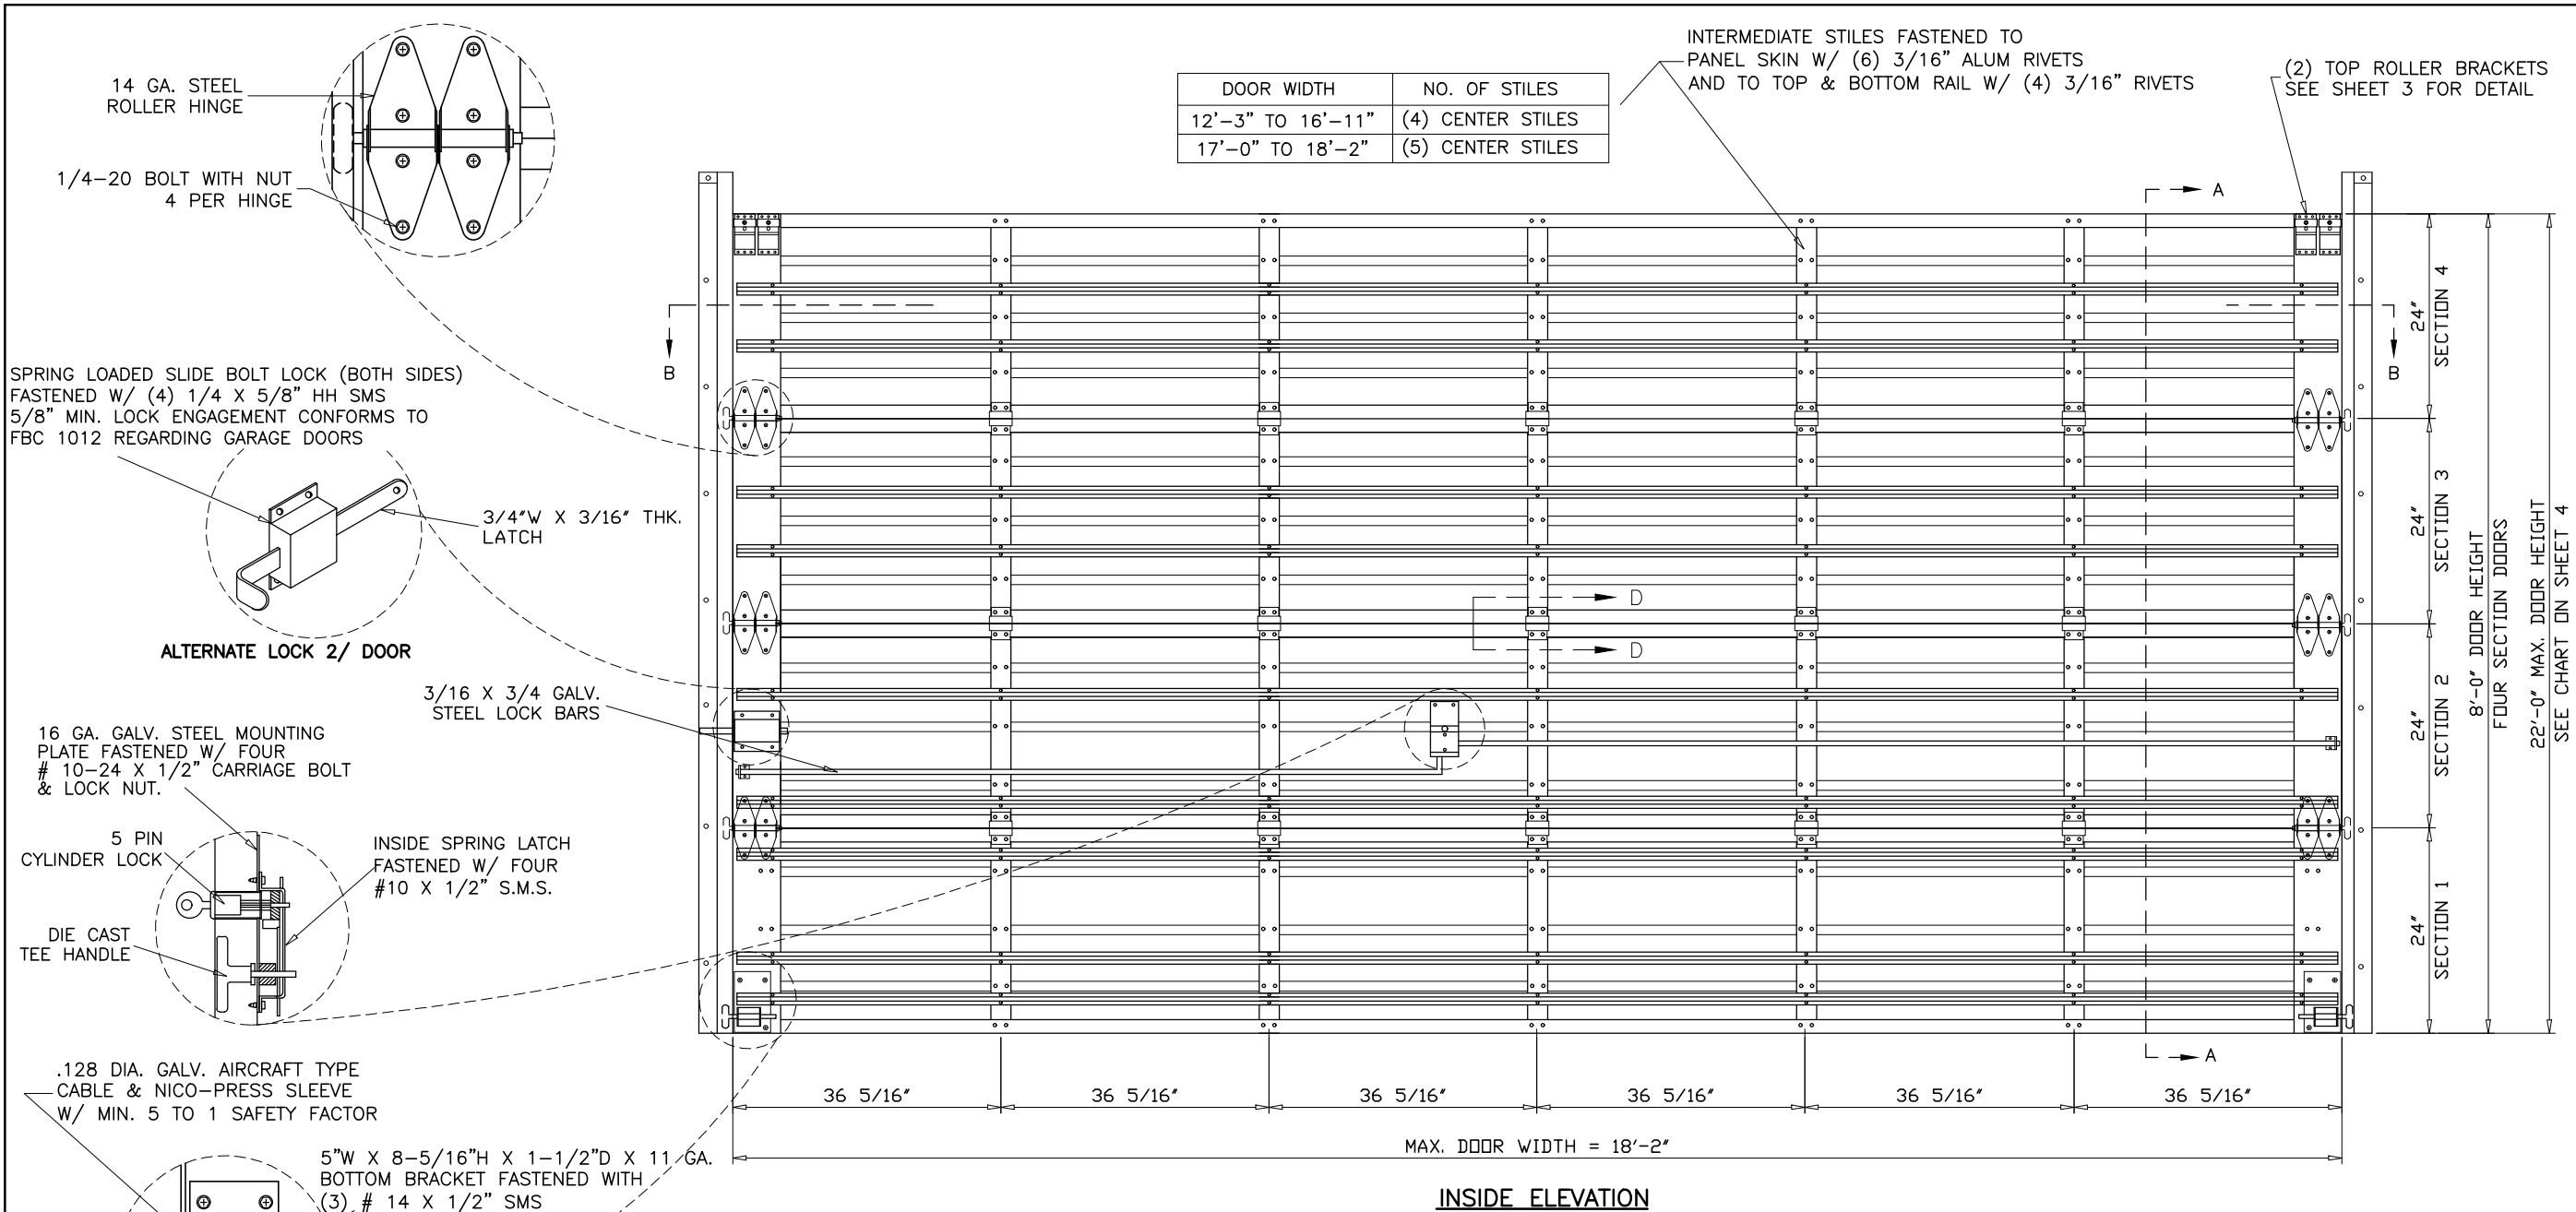

THIS PRODUCT IS RATED FOR LARGE MISSILE IMPACT

GENERAL NOTES

- THIS PRODUCT HAS BEEN DESIGNED AND TESTED TO COMPLY WITH THE REQUIREMENTS OF THE 2017 (6TH EDITION)/2020 (7TH EDITION) FLORIDA BUILDING CODE INCLUDING HIGH VELOCITY HURRICANE ZONE (HVHZ).
- ANCHORS SHALL BE CORROSION RESISTANT, SPACED AS SHOWN ON DETAILS AND INSTALLED PER MANUF'S INSTRUCTIONS. SPECIFIED EMBEDMENT TO BASE MATERIAL SHALL BE BEYOND WALL DRESSING OR STUCCO.
- A LOAD DURATION INCREASE IS USED IN DESIGN OF ANCHORS INTO WOOD ONLY.
- MATERIALS INCLUDING BUT NOT LIMITED TO STEEL/METAL SCREWS, THAT COME INTO CONTACT WITH OTHER DISSIMILAR MATERIALS SHALL MEET THE REQUIREMENTS OF THE 2017/2020 FLORIDA BLDG. CODE & ADOPTED STANDARDS.
- THIS PRODUCT APPROVAL IS GENERIC AND DOES NOT PROVIDE INFORMATION FOR A SITE SPECIFIC PROJECT, i.e. LIFE SAFETY OF THIS PRODUCT, ADEQUACY OF STRUCTURE RECEIVING THIS PRODUCT AND SEALING AROUND OPENING FOR WATER INFILTRATION RESISTANCE ETC. CONDITIONS NOT SHOWN IN THIS DRAWING ARE TO BE ANALYZED SEPARATELY, AND TO BE REVIEWED BY BUILDING OFFICIAL.
- MANUFACTURER'S LABEL SHALL BE LOCATED ON A READILY VISIBLE LOCATION IN ACCORDANCE WITH SECTION 1709.9.3 OF FLORIDA BUILDING CODE. LABELING TO COMPLY WITH SECTION 1709.9.2.

J.B. DOOR MODELS: 18'-2"W X 22'H MAX	
MODEL	DESCRIPTION
724	24 GA. ROLL FORMED STEEL DOOR
720	20 GA. ROLL FORMED STEEL DOOR

NOTE: MODEL 724 TESTED.

MAXIMUM DESIGN LOAD RATING = + 50.0 PSF
(FOR SIZES SHOWN OR SMALLER) - 60.0 PSF

PRODUCT RENEWED
as complying with the Florida
Building Code
NOA-No. 22-0215.01
Expiration Date 07/22/2027
By *[Signature]*
Miami-Dade Product Control

Sealed: 8/13/20



PRODUCT REVISED
as complying with the Florida
Building Code
NOA-No. 20-0819.05
Expiration Date 07/22/2022
By *[Signature]*
Miami-Dade Product Control

AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
9360 SUNSET DRIVE, SUITE 220
MIAMI, FLORIDA 33173
TEL. (305) 264-8100 FAX. (305) 262-6978
(C.A.N. 3538)

STEEL OVERHEAD GARAGE DOOR

J.B. Garage Doors Inc.

12195 N.W. 98th Ave.

Hialeah Gardens, FL 33018

Tel: (305) 822-7870 Fax: (305) 362-9272

no	date	by	description
E	9.13.13		NO CHANGE THIS SHEET
F	07.21.14		UPDATED TO 2014 FBC
G	01.06.17		EDITORIAL CHANGES
H	08.01.17		UPDATED TO 2017 FBC
I	07.10.20		UPDATED TO 2020 FBC

date:	02-01-99
scale:	NONE
dr. by:	TARIQ
chk. by:	

drawing no.
99-03
sheet 1 of 5

GARAGE 99-03JB

1-1/4" X 2-1/2" X 14 GA.
GALV. STEEL CONT. ANGLE
FASTENED TO WOOD JAMBS
W/ 5/16 X 1-5/8" LAG SCREWS
(FULLY THREADED)
HEX WASHER HEAD TYPE A
AT 3" FROM EACH END
AND 8" O.C. MAX.

OPTIONAL STOP MOULDING
BY DOOR INSTALLER

1-3/8" X 6-3/16" X 2-1/4" X 18 GA. STEEL
FORMED END STILE
RIVETED TO PANEL SKIN
WITH (6) 3/16" ALUM RIVETS
AND TO TOP AND BOTTOM RAILS
WITH (4) ALUM RIVETS

2-3/4" W X .036 THK. STEEL
FORMED CENTER STILE
RIVETED TO PANEL SKIN
WITH (6) 3/16" ALUM RIVETS
AND TO TOP AND BOTTOM RAILS
WITH (4) ALUM RIVETS

1/4-20 X 5/8" HEX HEAD
M.S. & LOCK NUT 4/ HINGE

STEEL STRUCTURE BY OTHERS
MUST SUPPORT THE LOADS IMPOSED
BY DOOR SYSTEM

1-1/4" X 2-1/2" X 14 GA
CONT. STEEL ANGLE

12 GA GALV. STEEL FLAT
BRACKET ± 3" LONG @ 12" O.C.
CONNECTED TO CONT. ANGLE
W/ (3) 1/4" Ø SPOT WELDS

1.82" DIA. X .50" ROLLERS
W/ .43 DIA. X 8" STEM

1" X 2" X 14 GA. GALV. STEEL
TRACK FASTENED TO TRACK PLATES
W/ (2) 1/4-20 X 5/8" TRUSS HD.
SLOTTED M.S. & LOCK NUT

DOUBLE ROLLER HINGES

16 GA. GALV. STEEL
CENTER HINGE FASTENED WITH
(4) # 14 SMS

INTERIOR SIDE

SECTION B-B

SECTION D-D

2-3/4" W X .036 THK. STEEL
FORMED CENTER STILE
RIVETED TO DOOR SKIN
WITH (6) 3/16" ALUM POP RIVETS
AND TO TOP AND BOTTOM RAILS
WITH (4) ALUM POP RIVETS

16 GA. GALV. STEEL
CENTER HINGE FASTENED WITH
(4) #14 X 5/8" HH SELF DRILLING SCREWS

FOR CONNECTION OF WOOD BUCK
TO MASONRY SEE NOTE ON SHEET 5
FOR CONNECTION DIRECTLY TO CONCRETE
SEE ALTERNATE DETAIL SHEET 5
CONNECTION TO METAL BUILDING TO BE
ENGINEERED ON JOB TO JOB BASIS.

PRODUCT RENEWED
as complying with the Florida
Building Code
NOA-No. 22-0215.01

Expiration Date 07/22/2027

By 
Miami-Dade Product Control

PRODUCT REVISED
as complying with the Florida
Building Code
NOA-No. 20-0819.05

Expiration Date 07/22/2022

By 
Miami-Dade Product Control

Sealed: 8/13/20



af c
AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
9360 SUNSET DRIVE, SUITE 220
MIAMI, FLORIDA 33173
TEL. (305) 264-8100 FAX. (305) 262-6978
(C.A.N. 3538)

STEEL OVERHEAD GARAGE DOOR

J.B. Garage Doors Inc.


12195 N.W. 98th Ave.
Hialeah Gardens, FL 33018

Tel: (305) 822-7870 Fax: (305) 362-9272

revisions:		description
no	date	by
E	9.13.13	NO CHANGE THIS SHEET
F	07.21.14	NO CHANGE THIS SHEET
G	01.06.17	EDITORIAL CHANGES
H	08.01.17	NO CHANGE THIS SHEET
I	07.10.20	EDITORIAL CHANGES


date:	02-01-99
scale:	NONE
dr. by:	TARIQ
chk. by:	

drawing no.
99-03
sheet 2 of 5

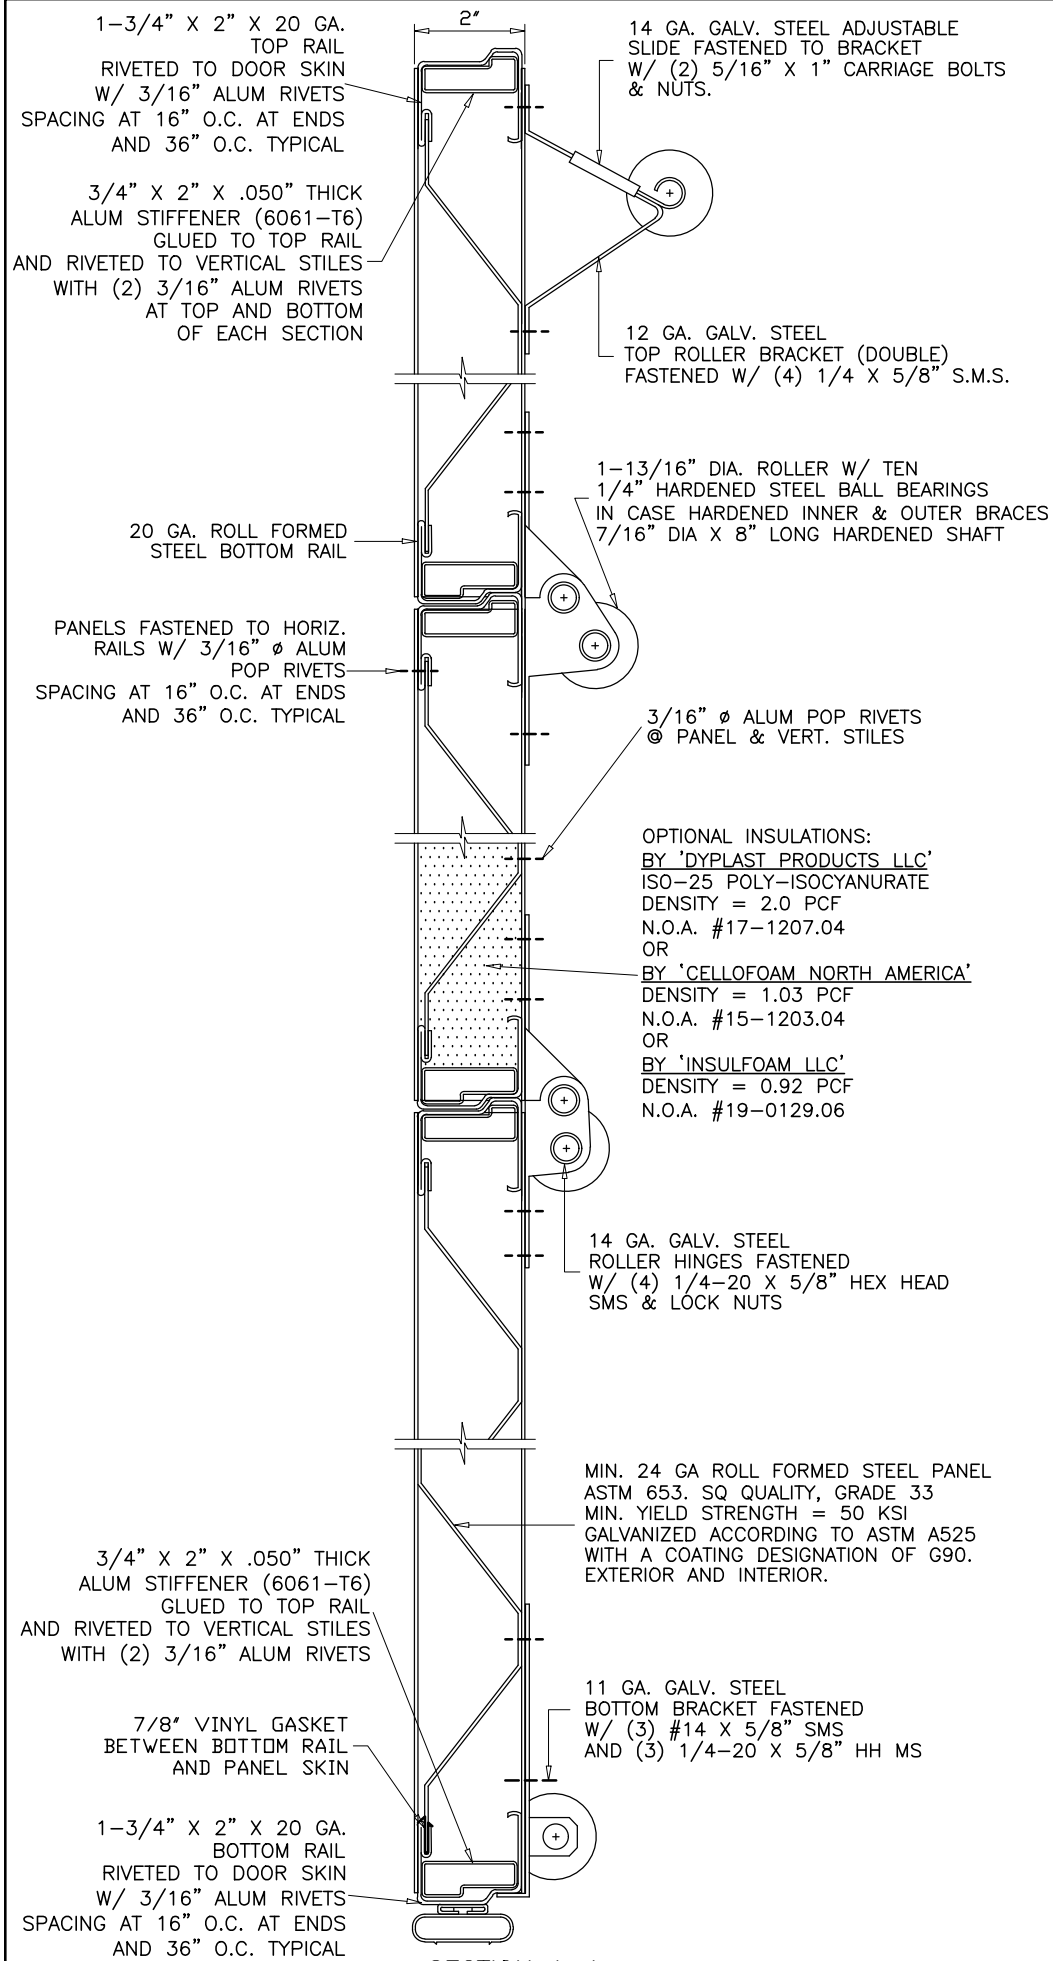

SEE SECTIONS AT RIGHT FOR LOCATION OF REINFORCING TRUSSES


TWO (2) REINFORCING TRUSSES PER SECTION EXCEPT THREE (3) ON THE BOTTOM SECTION

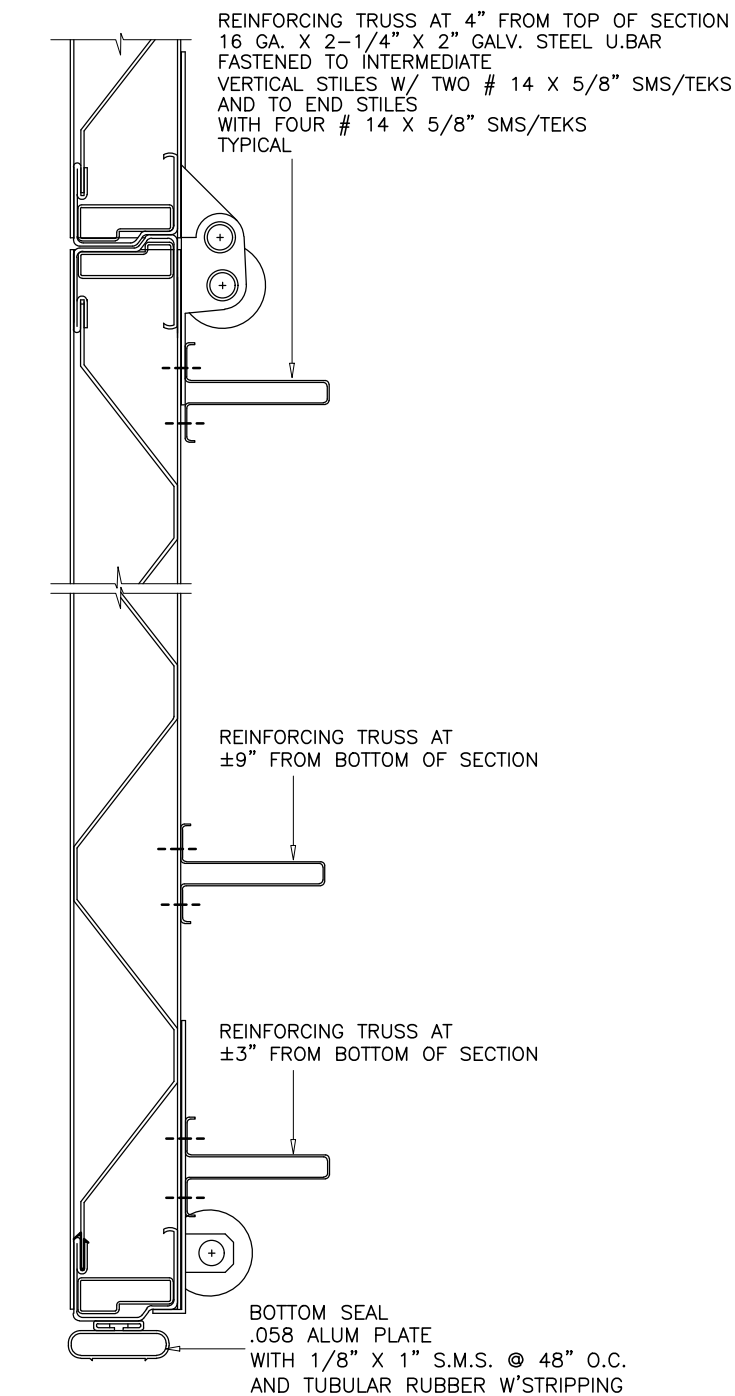


1ST SECTION (BOTTOM)
REINFORCING

PRODUCT RENEWED
as complying with the Florida Building Code
NOA-No. 22-0215.01
Expiration Date 07/22/2027
By *[Signature]*
Miami-Dade Product Control


PRODUCT REVISED
as complying with the Florida Building Code
NOA-No. 20-0819.05
Expiration Date 07/22/2022
By *[Signature]*
Miami-Dade Product Control

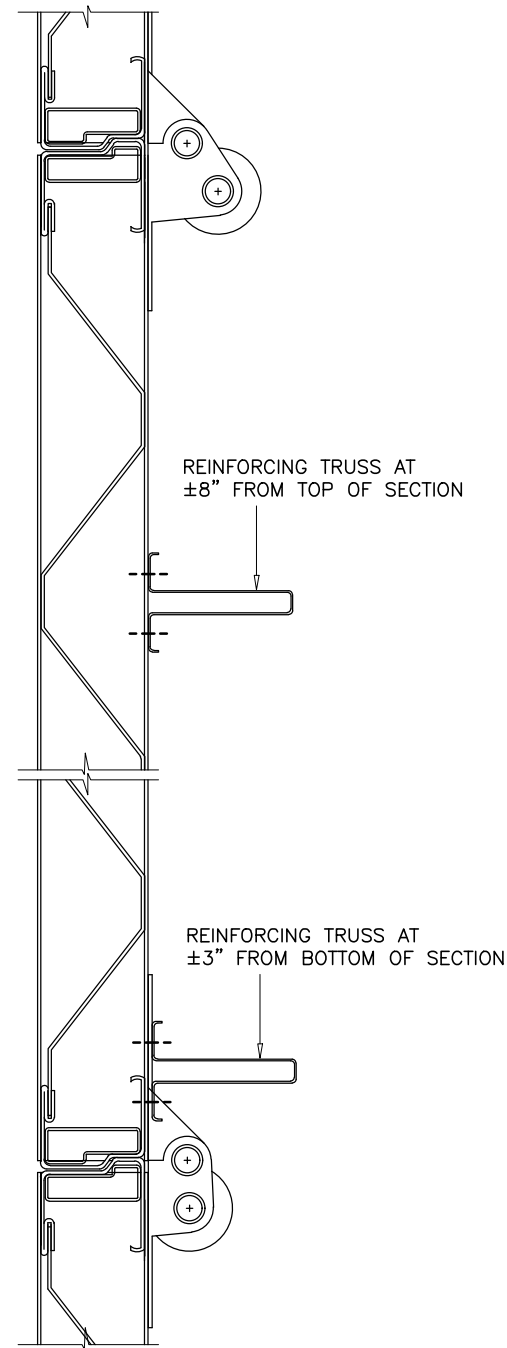

2ND SECTION (BOTTOM)
REINFORCING

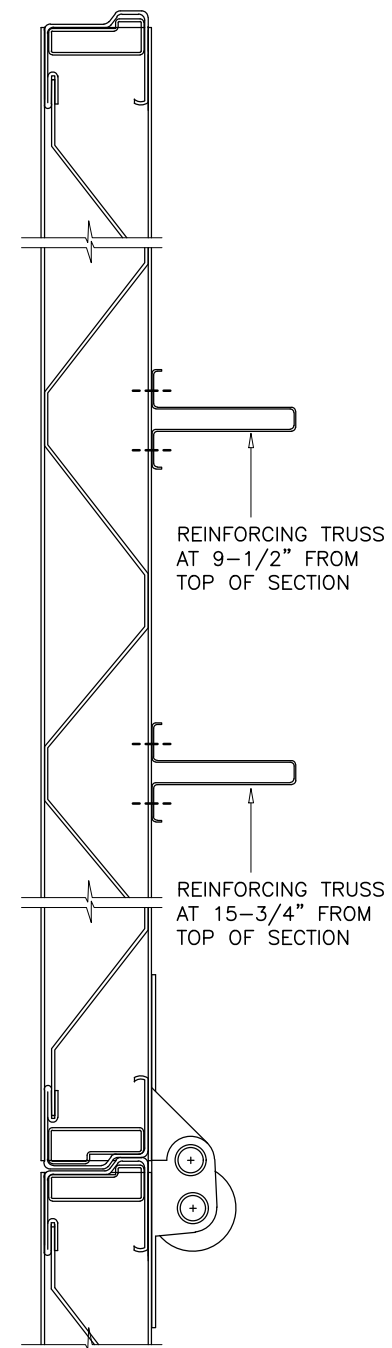

ALL TOP SECTIONS
REINFORCING

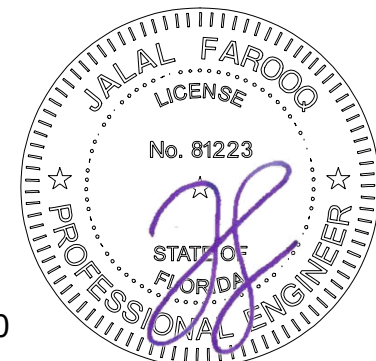

Sealed: 8/13/20

AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
9360 SUNSET DRIVE, SUITE 220
MIAMI, FLORIDA 33173
TEL. (305) 264-8100 FAX. (305) 262-6978

GARAGE 99-03JB



STEEL OVERHEAD GARAGE DOOR

J.B. Garage Doors Inc.
12195 N.W. 98th Ave.
Hialeah Gardens, FL 33018
Tel: (305) 822-7870 Fax: (305) 362-9272

no	date	description
E	9.13.13	REV. PER PER COMMENTS
F	07.21.14	UPDATED TO 2014 FBC
G	01.06.17	EDITORIAL CHANGES
H	08.01.17	UPDATED TO 2017 FBC
I	07.10.20	UPDATED TO 2020 FBC

date: 02-01-99
scale: NONE
dr. by: TARIQ
chk. by:


drawing no. **99-03**
sheet 3 of 5

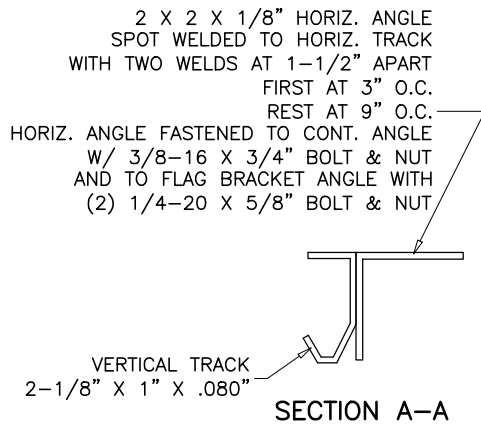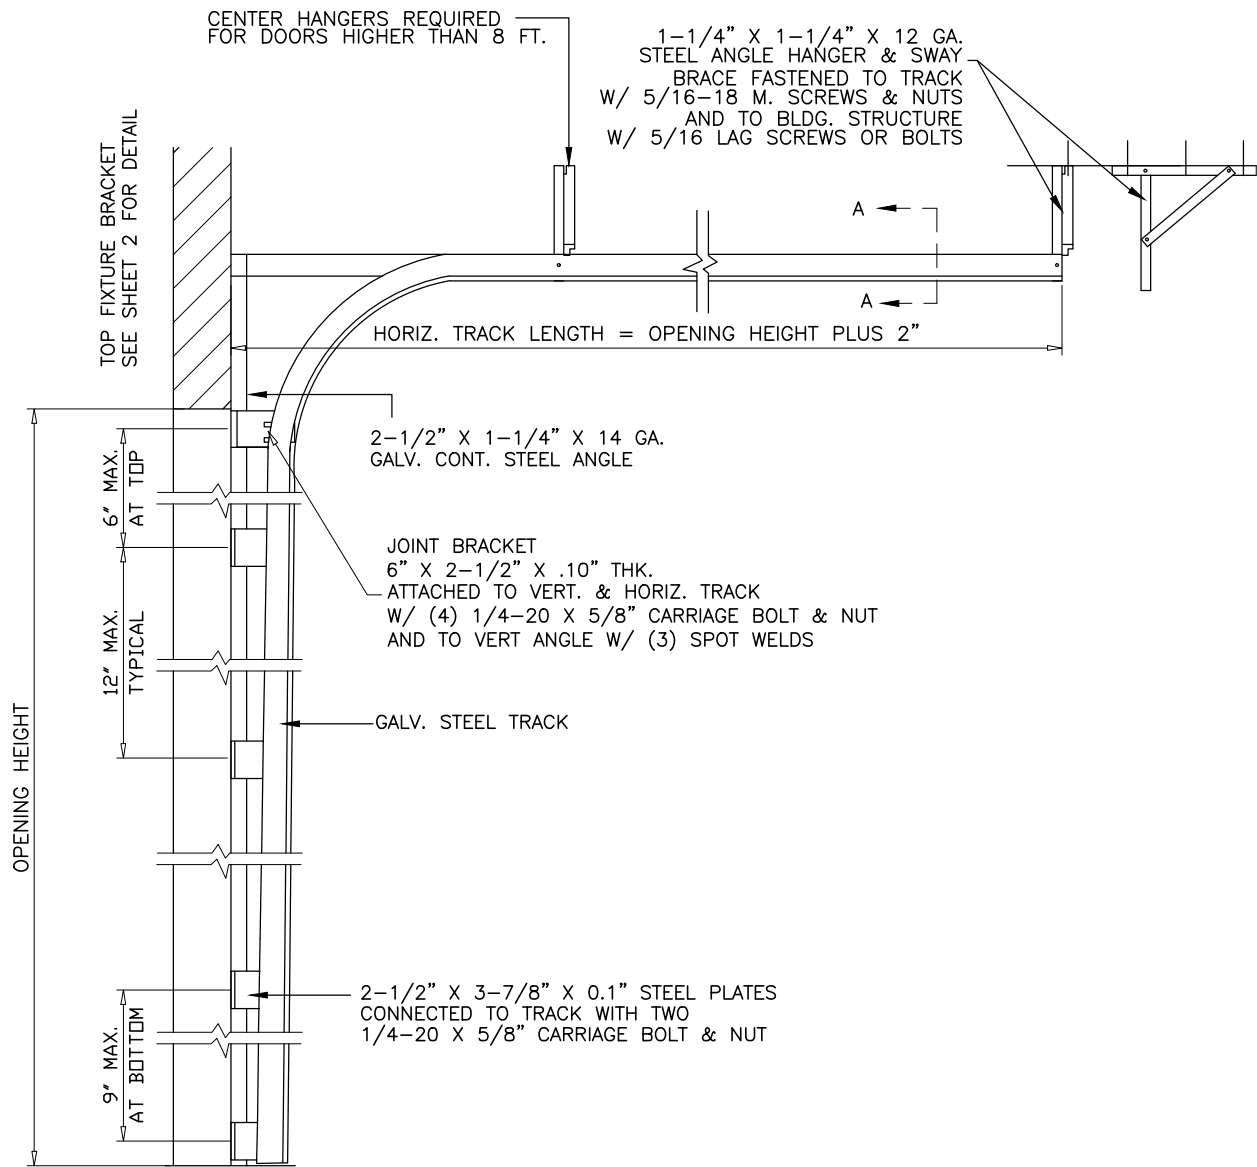

**DOOR TRACK AS VIEWED
FROM CENTER OF OPENING**

DOOR HEIGHT	NO. OF TRUSSES	SECTION HEIGHTS *										
		1ST	2ND	3RD	4TH	5TH	6TH	7TH	8TH	9TH	10TH	11TH
7'-0"	9	21"	21"	21"	21"	N/A	N/A	N/A	N/A	N/A	N/A	N/A
8'-0"	9	24"	24"	24"	24"	N/A	N/A	N/A	N/A	N/A	N/A	N/A
9'-0"	11	24"	21"	21"	21"	21"	N/A	N/A	N/A	N/A	N/A	N/A
10'-0"	11	24"	24"	24"	24"	24"	N/A	N/A	N/A	N/A	N/A	N/A
11'-0"	13	24"	24"	21"	21"	21"	21"	N/A	N/A	N/A	N/A	N/A
12'-0"	13	24"	24"	24"	24"	24"	24"	N/A	N/A	N/A	N/A	N/A
13'-0"	15	24"	24"	24"	21"	21"	21"	21"	N/A	N/A	N/A	N/A
14'-0"	15	24"	24"	24"	24"	24"	24"	24"	N/A	N/A	N/A	N/A
15'-0"	17	24"	24"	24"	24"	21"	21"	21"	21"	N/A	N/A	N/A
16'-0"	17	24"	24"	24"	24"	24"	24"	24"	24"	N/A	N/A	N/A
17'-0"	19	24"	24"	24"	24"	24"	21"	21"	21"	21"	N/A	N/A
18'-0"	19	24"	24"	24"	24"	24"	24"	24"	24"	24"	N/A	N/A
19'-0"	21	24"	24"	24"	24"	24"	24"	21"	21"	21"	21"	N/A
20'-0"	21	24"	24"	24"	24"	24"	24"	24"	24"	24"	24"	N/A
21'-0"	23	24"	24"	24"	24"	24"	24"	24"	21"	21"	21"	21"
22'-0"	23	24"	24"	24"	24"	24"	24"	24"	24"	24"	24"	24"

*-SECTIONS ARE NUMBERED STARTING AT THE BOTTOM

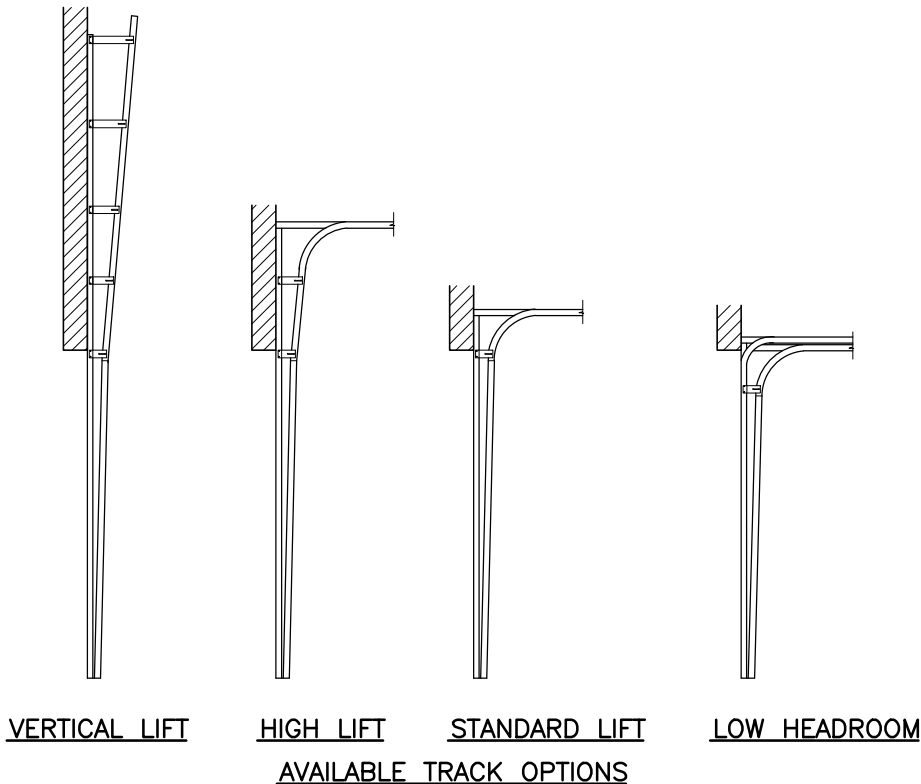

PRODUCT RENEWED
as complying with the Florida
Building Code
NOA-No. 22-0215.01
Expiration Date 07/22/2027
By *[Signature]*
Miami-Dade Product Control

PRODUCT REVISED
as complying with the Florida
Building Code
NOA-No. 20-0819.05
Expiration Date 07/22/2022
By *[Signature]*
Miami-Dade Product Control



Sealed: 8/13/20

a f c

AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
9360 SUNSET DRIVE, SUITE 220
MIAMI, FLORIDA 33173
TEL. (305) 264-8100 FAX. (305) 262-6978

GARAGE\99-03JB

STEEL OVERHEAD GARAGE DOOR

J.B. Garage Doors Inc.
12195 N.W. 98th Ave.
Hialeah Gardens, FL 33018
Tel: (305) 822-7870 Fax: (305) 362-9272

revisions:

no	date	description
E	9.13.13	NO CHANGE THIS SHEET
F	07.21.14	NO CHANGE THIS SHEET
G	01.06.17	EDITORIAL CHANGES
H	08.01.17	NO CHANGE THIS SHEET
I	07.10.20	EDITORIAL CHANGES

date: 02-01-99

scale: NONE

dr. by: TARIQ

chk. by:

drawing no.

99-03

sheet 4 of 5

WOOD FRAME BUILDINGS

STUD WALLS OR DOOR OPENING (NOT BY J.B. DOORS) SHALL BE FRAMED SOLID BY NOT LESS THAN (3) 2X6 PRESSURE TREATED GRADE 2 SYP OR BETTER WOOD STUDS. STUD WALLS TO BE CONT. FROM FOOTING TO TIE BEAM. ENGINEER OF RECORD TO VERIFY ADEQUACY OF THE SUPPORTING STRUCTURE.

WOOD BUCK CONNECTION TO MASONRY

TRACK SHALL BE SECURED WITH CONT. STEEL ANGLE TO PRESSURE TREATED 2X6 SYP WOOD JAMBS WHICH SHALL BE ANCHORED TO GROUTED REINFORCED MASONRY BLOCK WALL OR CONC. COLUMN WITH

1/4" ULTRACON+ BY 'DEWALT' WITH SPACING OF 6" O.C. INTO GROUT FILLED BLOCK WALL, WITH 2-1/4" MIN. EMBED 7" O.C. INTO 3000 PSI CONCRETE, WITH 1-3/4" MIN. EMBED 2-1/2" MIN. EDGE DISTANCE


1/4" TAPPER BY 'POWERS' WITH SPACING OF 5" O.C. INTO GROUT FILLED BLOCK WALL, WITH 1-1/2" MIN. EMBED 5" O.C. INTO 3000 PSI CONCRETE, WITH 1-3/4" MIN. EMBED 3" MIN. EDGE DISTANCE

3/8" CONFLEX BY 'DEWALT' OR 3/8" LDT BY 'ITW' WITH SPACING OF 12" O.C. INTO 3000 PSI CONCRETE, WITH 2-1/2" MIN. EMBED 3" MIN. EDGE DISTANCE

3/8" HLC SLEEVE BY 'HILTI' WITH SPACING OF 7" O.C. INTO 3000 PSI CONCRETE, WITH 1-1/4" MIN. EMBED AND 2-1/2" MIN. EDGE DISTANCE

THE BLOCK WALL CELLS SHALL BE GROUT FILLED AND REINFORCED WITH FOUR # 5 BARS EXTENDING INTO FOOTING AND INTO TIE BEAMS ALL BARS SHALL BE CONTINUOUS FROM TIE BEAMS TO FOOTING.

PREPARATION OF JAMBS BY OTHERS

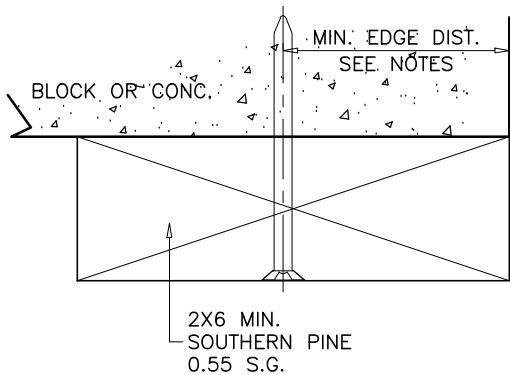

STEEL STRUCTURE BY OTHERS MUST SUPPORT THE LOADS IMPOSED BY DOOR SYSTEM

5/16" DIA. BOLTS WITH WASHER & NUT AT 12" O.C. MAX.

1-1/4" X 2-1/2" X 14 GA CONT. STEEL ANGLE
0.10" THK. GALV. STEEL FLAT BRACKETS ±3-7/8" LONG AT 12" O.C. IN DOOR OPNG. AT 18" O.C. ABOVE DOOR OPNG. CONNECTED TO CONT. ANGLE W/ (3) SPOT WELDS

ANCHOR SPACING				
ANCHORS	STRUCTURE	EMBED	SPACING	EDGE DIST.
3/8" HLC SLEEVE BY 'HILTI'	CONC.	1-1/4"	8"	3"
3/8" CONFLEX BY 'DEWALT'	FILLED BLOCK	2"	8"	3-3/4"
3/8" DYNABOLT BY 'ITW'	CONC.	1-1/2"	8"	3-1/2"
3/8" POWER-BOLT BY 'POWERS'	CONC.	2"	8"	1-7/8"
3/8" SLEEVE-ALL BY 'SIMPSONS'	CONC.	1-1/2"	8"	3-1/2"

CONCRETE f'c = 3000 PSI MIN.
C-90 GROUT FILLED BLOCK f'm = 2000 PSI MIN.

TRACK INSTALLATION

PRODUCT RENEWED as complying with the Florida Building Code
NOA-No. 22-0215.01

Expiration Date 07/22/2027

By [Signature] Miami-Dade Product Control

PRODUCT REVISED as complying with the Florida Building Code
NOA-No. 20-0819.05

Expiration Date 07/22/2022

By [Signature] Miami-Dade Product Control



Sealed: 8/13/20

a f c

AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
9360 SUNSET DRIVE, SUITE 220
MIAMI, FLORIDA 33173
TEL. (305) 264-8100 FAX. (305) 262-6978
(C.A.N. 3538)

STEEL OVERHEAD GARAGE DOOR

J.B. Garage Doors Inc.

12195 N.W. 98th Ave.

Hialeah Gardens, Fl. 33018

Tel: (305) 822-7870

Fax: (305) 362-9272

revisions:	no	date	by	description
	E	9.13.13		NO CHANGE THIS SHEET
	F	07.21.14		UPDATED TO 2014 FBC
	G	01.06.17		EDITORIAL CHANGES
	H	08.01.17		NO CHANGE THIS SHEET
	I	07.10.20		UPDATED TO 2020 FBC

date: 02-01-99	scale: NONE	dr. by: TARIQ	chk. by:
----------------	-------------	---------------	----------

drawing no.	99-03
sheet 5 of	5