



DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)  
BOARD AND CODE ADMINISTRATION DIVISION

## NOTICE OF ACCEPTANCE (NOA)

MIAMI-DADE COUNTY  
PRODUCT CONTROL SECTION

11805 SW 26 Street, Room 208  
Miami, Florida 33175-2474  
T (786) 315-2590 F (786) 315-2599

[www.miamidade.gov/building](http://www.miamidade.gov/building)

**Eastman Chemical Company (MA)**  
**730 Worcester Street**  
**Springfield, MA 01151**

**SCOPE:** This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER-Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

**DESCRIPTION: Saflex® FlySafe™ 3D PVB Interlayers for Laminated Glass**

**APPROVAL DOCUMENT:** Drawing No. **2008**, titled “Saflex® FlySafe™ 3D Interlayers for Laminated Glass”, sheets 1 through 3 of 3, dated 02/08/22, prepared by W. W. Schaefer Engineering & Consulting, P.A., signed and sealed by Warren W. Schaefer, P.E., bearing the Miami-Dade County Product Control Revision stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

**MISSILE IMPACT RATING: None**

**LABELING:** Glass lites laminated under this Product Approval shall be permanently marked in a corner of the glass with: a) **Saflex FlySafe 3D**, b) Authorized laminator’s name, c) M.D.C.A., that stands for Miami Dade County Approved and d) Markings required by federal law for safety glazing. The laminate’s or interlayer’s packaging is to identify the manufacturer’s name or logo, manufacturing plant’s city and state, and the statement reading ‘Miami-Dade County Product Control Approved’.

**LIMITATION: This approval does not include an evaluation of structural performance of this component.**

**RENEWAL** of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

**TERMINATION** of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.


**ADVERTISEMENT:** The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

**INSPECTION:** A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **revises NOA No. 22-0217.01** and consists of this page 1 and evidence pages E-1, E-2 and E-3, as well as approval document mentioned above.

The submitted documentation was reviewed by **Manuel Perez, P.E.**



  
8/7/23

NOA No. 23-0713.19  
Expiration Date: March 31, 2027  
Approval Date: August 17, 2023  
Page 1

**Eastman Chemical Company (MA)**

**NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED**

**1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's**

**A. DRAWINGS**

1. Drawing No. **2008**, titled "Saflex® FlySafe™ 3D Interlayers for Laminated Glass", sheets 1 through 3 of 3, dated 02/08/22, prepared by W. W. Schaefer Engineering & Consulting, P.A., signed and sealed by Warren W. Schaefer, P.E.  
*(Submitted under NOA No. 22-0217.01)*

**B. TESTS**

	<u>Test Report</u>	<u>Test Standard</u>	<u>Date</u>	<u>Signature</u>
1.	Intertek-M9090.01-106-18 R0	ASTM D2843	01/17/22	Vinu J. Abraham, P.E.
2.	Intertek-M9090.01-106-18 R0	ASTM D1929	01/17/22	Vinu J. Abraham, P.E.
3.	Intertek-M9090.01-106-18 R0	ASTM D635	01/17/22	Vinu J. Abraham, P.E.

*(Submitted under NOA No. 22-0217.01)*

	<u>Test Report</u>	<u>Test Standard</u>	<u>Date</u>	<u>Signature</u>
4.	ETC-07-726-20120.0	ASTM C158	07/17/08	Joseph L. Doldan, P.E.
5.	ETC-96-191-3253.0	ASTM G26 & C158	07/17/08	Joseph L. Doldan, P.E.
6.	ETC-98-191-5523.0	ASTM D635	07/17/08	Joseph L. Doldan, P.E.

*(Submitted under NOA No. 21-0216.01)*

**C. CALCULATIONS**


1. None.

**D. QUALITY ASSURANCE**

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

**E. MATERIAL CERTIFICATIONS**

1. None.

  
Manuel Pérez, P.E.  
Product Control Examiner  
NOA No. 23-0713.19  
Expiration Date: March 31, 2027  
Approval Date: August 17, 2023

**Eastman Chemical Company (MA)**

**NOTICE OF ACCEPTANCE: EVIDENCE PAGE**


**1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's (CONTINUED)**

**F. STATEMENTS**

1. Statement letter of code conformance, complying with **FBC 7<sup>th</sup> Edition (2020)** issued by W. W. Schaefer Engineering & Consulting, P.A., dated 03/21/22, signed and sealed by Warren W. Schaefer, P.E.  
*(Submitted under NOA No. 22-0217.01)*
2. Statement letter of no financial interest issued by W. W. Schaefer Engineering & Consulting, P.A., dated 03/21/22, signed and sealed by Warren W. Schaefer, P.E.  
*(Submitted under NOA No. 22-0217.01)*

**G. OTHERS**

1. None.

  
Manuel Pérez, P.E.  
Product Control Examiner  
NOA No. 23-0713.19  
Expiration Date: March 31, 2027  
Approval Date: August 17, 2023

**Eastman Chemical Company (MA)**

**NOTICE OF ACCEPTANCE: EVIDENCE PAGE**

**2. NEW EVIDENCE SUBMITTED**

**A. DRAWINGS**

1. None.

**B. TESTS**

1. None.

**C. CALCULATIONS**

1. None.

**D. QUALITY ASSURANCE**

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

**E. MATERIAL CERTIFICATIONS**


1. None.

**F. STATEMENTS**

1. Statement letter of conformance, complying with **FBC 8<sup>th</sup> Edition (2023)** and with **FBC 7<sup>th</sup> Edition (2020)**, dated July 1, 2023, issued by W. W. Schaefer Engineering & Consulting, P.A. and signed and sealed by Warren W. Schaefer, P.E.

**G. OTHERS**

1. Notice of Acceptance No. **22-0217.01** issued to **Eastman Chemical Company (MA)** for their "**Saflex® FlySafe™ 3D PVB Interlayer for Laminated Glass**" dated 03/31/22, expiring on 03/31/27.

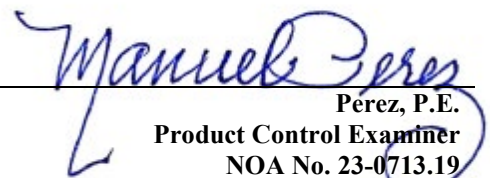

Perez, P.E.


Product Control Examiner

NOA No. 23-0713.19

Expiration Date: March 31, 2027

Approval Date: August 17, 2023

A B A

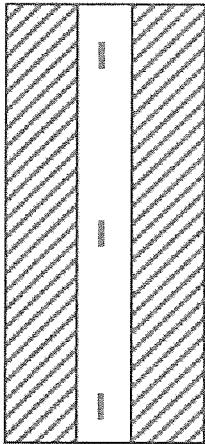

# Saflex® FlySafe™ 3D PVB Interlayer

## Product Description

Manufactured by: Eastman Chemical Company  
 Description: Clear or Colored extruded interlayers made of polyvinyl butyral resin and triethyleneglycol bis(2-ethyl hexanoate) plasticizer. Interlayer is offered under the brand name of Saflex® FlySafe™ 3D for lamination between a minimum of two glasses. The interlayer is supplied with polyethylene terephthalate base elements not covering more than 85% of the surface. These elements are attached to the interlayer to cause visual noise. A typical glazing is made of the following components (minimum thicknesses indicated – multiple plies of interlayer to be used as necessary.

**SECTION**  
**PRODUCT REVISED**  
 As complying with the Florida Building Code  
 NOA-No. **23-0713.19**  
 Expiration Date: **03/31/2027**  
 By: *Manuel Perez*  
 Miami-Dade Product Control

A – 2.3 mm (3/32 in)	Glass	<b>PRODUCT APPROVED</b> as complying with the Florida Building Code
B – 0.76 mm (0.030 in)	Saflex® FlySafe™ 3D interlayers	NOA-No. 22-0217.01 Approval Date 03/31/2022

By: *R. P. Perez*  
 Miami-Dade Product Control

## Product Properties

Description	Test	Saflex® FlySafe™ 3D
(1) Self-Ignition temperature	ASTM D1929	380°C (716°F)
(1) Smoke Density	ASTM D2843	10.8
(1) Rate of Burning	ASTM D635	Class CC1
(1) Time of Burning	ASTM D635	< 5 sec
(1) Extent of Burning	ASTM D635	None sustained
(1) Avg Mod of Rupture	ASTM C158	(1) Weathering (3) Before: 2556 psi After: 2657 psi

- 1) Specimen: Laminated glass with Saflex® and/or Vanceva® interlayer
- 2) Interlayer by itself (unprotected) does NOT comply with Florida Building Code
- 3) Weathering per section 2615 of the Florida Building Code – Data from Saflex PVB interlayer NOA  
 \* Saflex and Vanceva are registered trademarks of Eastman Chemical Company

A	Original	02/08/22

<p>Warren W. Schaefer, P.E.                  Structural Engineer                  P.E. No. 44135</p>	<b>Eastman Chemical Company</b> 730 Worcester Street, Springfield, MA 01151 Phone: 413-730-3413 E-mail: <a href="mailto:glazing@eastman.com">glazing@eastman.com</a>			
	Title: <b>Saflex® FlySafe™ 3D Interlayers for Laminated Glass</b>			
W.W. Schaefer Engineering & Consulting, P.A. Structural Consulting Engineers 7480 150 <sup>th</sup> Court North Palm Beach Gardens, FL 33418 Phone: 561-744-3424	Drawing Number 2008	Sheet Number 1 of 3	Drawing Date 02/08/22	Revisions Date

Rev #	Description	Date
-------	-------------	------

Saflex® FlySafe™ 3D PVB interlayer continued

### Saflex® Multi-layer Product Properties


Footnote	Description	Test	Dade County Criteria	Saflex Multi-layer Series (2)
(1)	Test for Smoke Density	ASTM D2843	Passed (<75%)	20.7
(1)	Self-Ignition Temperature	ASTM D1929	Passed (>550°F)	716°F
(1)	Rate of Burning	ASTM D635	Passed (C-1; ,1.0 in/min)	CC1
(1)	Average Time of Burning	ASTM D635	---	<5 sec.
(1)	Average Extent of Burning	ASTM D635	---	None sustained
(1) & (3)	Average Modulus of Rupture	ASTM C158	Passed (<10.0%)	Delta: 4.9% Before: 3842 psi After: 4042 psi

- 1) Specimen: Laminated glass with Saflex® and/or Vanceva® interlayer
- 2) Interlayer by itself (unprotected) does NOT comply with Florida Building Code
- 3) Weathering per section 2615 of the Florida Building Code

### Saflex® and Vanceva® Solar/Color and Colorant Properties

Material Designation	Smoke Density Rating ASTM D2843	Dade Notification #
Vanceva® & Saflex® - Clear	11.8%	M9090.01-106-18 RO
Vanceva® & Saflex® - White	20%	ETC-11-726-25079.0
Vanceva® & Saflex® - Black	2%	ETC-11-726-25079.0
Vanceva® & Saflex® - Blue	29.5%	M9090.01-106-18 RO
Vanceva® & Saflex® - Yellow	9%	ETC-11-726-25079.0
Vanceva® & Saflex® - Red	10%	ETC-11-726-25079.0

<p><b>PRODUCT REVISED</b> As complying with the Florida Building Code NOA-No. <b>23-0713.19</b> Expiration Date: <b>03/31/2027</b> By: <i>Manuel Perez</i> Miami-Dade Product Control</p>	<p><b>PRODUCT APPROVED</b> as complying with the Florida Building Code NOA-No. <u>22-0217.01</u> Approval Date <u>03/31/2022</u> By: <i>[Signature]</i> Miami-Dade Product Control</p>
---	--

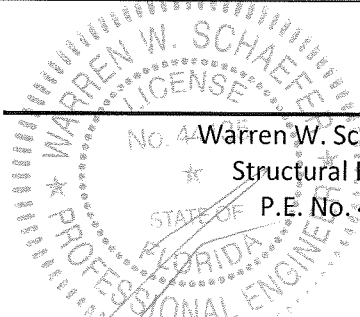 No. 44135 Warren W. Schaefer, P.E. Structural Engineer P.E. No. 44135 <b>FEB 14 2022</b>	<b>Eastman Chemical Company</b> 730 Worcester Street, Springfield, MA 01151 Phone: 413-730-3413 E-mail: <a href="mailto:glazing@eastman.com">glazing@eastman.com</a>			
	<b>Title: Saflex® FlySafe™ 3D Interlayers for Laminated Glass</b>			
W.W. Schaefer Engineering & Consulting, P.A. Structural Consulting Engineers 7480 150 <sup>th</sup> Court North Palm Beach Gardens, FL 33418 Phone: 561-744-3424	Drawing Number 2008	Sheet Number 2 of 3	Drawing Date 02/08/22	Revisions Date



Saflex® FlySafe™ 3D PVB interlayer continued

Saflex® interlayers are known as Saflex®, Saflex® Clear, Saflex® colors, Saflex® FlySafe™ 3D, Saflex® multi-layer, Saflex® Storm, Saflex® Secure, Saflex® Structural, Saflex® Synergy, SilentGlass Technology™, Vanceva® Color and Vanceva® Earth Tones.

Vanceva and/or Saflex are known as: AR, CL, DA through DZ, KA through KZ, MG, NA through NZ, RA through RZ, SA through SZ, UA - UZ and VA through VS. (e.g.: RB41, NA71).

Saflex® Multi-layer interlayers are known as: Q series (QA through QZ) and Silent Glass Technology (e.g.: QB51, QS41 etc.)

® Saflex and Vanceva are registered trademarks of Eastman Chemical Company

™Silent glass Technology is a trademark of Eastman Chemical Company

™FlySafe is a trademark of Eastman Chemical Company.

This is a component approval and does not include an evaluation of structural performance of this component. Systems incorporating this component shall apply for an NOA to the Miami-Dade Product Control and shall submit test reports and other required documents showing that the systems using this component will resist the loads according to chapter 16 of the F.B.C. A list of authorized laminators shall be filed with Miami-Dade County by Eastman Chemical Company.

**PRODUCT REVISED**  
As complying with the Florida Building Code

NOA-No. **23-0713.19**

Expiration Date: **03/31/2027**


By: Manuel Perez  
Miami-Dade Product Control

**PRODUCT APPROVED**  
as complying with the Florida Building Code

NOA-No. 22-0217.01

Approval Date 03/31/2022

By: [Signature]  
Miami-Dade Product Control

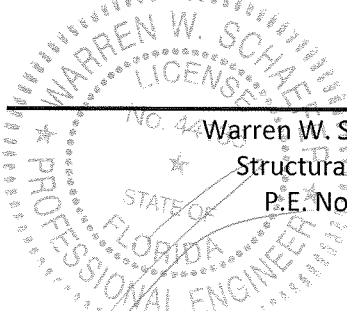 <p>Warren W. Schaefer, P.E. Structural Engineer P.E. No. 44135 FEB 14 2022</p>	<p><b>Eastman Chemical Company</b> 730 Worcester Street, Springfield, MA 01151 Phone: 413-730-3413 E-mail: <a href="mailto:glazing@eastman.com">glazing@eastman.com</a></p>			
	<p>Title: <b>Saflex® FlySafe™ 3D Interlayers for Laminated Glass</b></p>			
<p>W.W. Schaefer Engineering &amp; Consulting, P.A. Structural Consulting Engineers 7480 150<sup>th</sup> Court North Palm Beach Gardens, FL 33418 Phone: 561-744-3424</p>	<p>Drawing Number 2008</p>	<p>Sheet Number 3 of 3</p>	<p>Drawing Date 02/08/22</p>	<p>Revisions Date</p>