



DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
BOARD AND CODE ADMINISTRATION DIVISION

NOTICE OF ACCEPTANCE (NOA)

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION

11805 SW 26 Street, Room 208
Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599

www.miamidade.gov/building

Eastman Chemical Company (MA)
730 Worcester Street
Springfield, MA 01151

SCOPE: This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER-Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Saflex® PVB Clear and Colored Interlayers for Laminated Glass

APPROVAL DOCUMENT: Drawing No. **1813**, titled "Saflex Based Interlayers for Laminated Glass", sheets 1 through 3 of 3, dated 04/06/12 and last revised on 08/27/25, prepared by W. W. Schaefer Engineering & Consulting, P.A., signed and sealed by Warren W. Schaefer, P.E., bearing the Miami-Dade County Product Control Revision stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: None

LABELING: Glass lites laminated under this Product Approval shall be permanently marked in a corner of the glass with: a) **Saflex**, b) Authorized laminator's name, c) M.D.C.A., that stands for Miami Dade County Approved and d) Markings required by federal law for safety glazing. The laminate's or interlayer's packaging is to identify the manufacturer's name or logo, manufacturing plant's city and state, and the statement reading 'Miami-Dade County Product Control Approved'.

LIMITATION: This approval does not include an evaluation of structural performance of this component.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **revises NOA No. 25-0904.04** and consists of this page 1 and evidence pages E-1, E-2, and E-3 as well as approval document mentioned above.

The submitted documentation was reviewed by **Carlos M. Utrera, P.E.**



08/11/26

NOA No. 26-0625.17
Expiration Date: May 21, 2031
Approval Date: August 20, 2026
Page 1

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's

A. DRAWINGS

1. Drawing No. **1813**, titled "Saflex® Based Interlayers for Laminated Glass", sheets 1 through 3 of 3, dated 04/06/12, with Revision **D**, dated 07/29/20, prepared by W.W. Schaefer Engineering & Consulting, P.A., signed and sealed by Warren W. Schaefer, P.E.
(Submitted under NOA No. 21-0216.01)

B. TESTS

	<u>Test Report</u>	<u>Test Standard</u>	<u>Date</u>	<u>Signature</u>
1.	ETC-11-726-25078.0	ASTM D1929/D2843	03/08/11	Joseph L. Doldan, P.E.
2.	ETC-11-726-25076.0	ASTM D1929/D2843	03/08/11	Joseph L. Doldan, P.E.
3.	ETC-11-726-25080.0	ASTM D1929/D2843	03/08/11	Joseph L. Doldan, P.E.
4.	ETC-11-726-25077.0	ASTM D1929/D2843	03/08/11	Joseph L. Doldan, P.E.
5.	ETC-11-726-25079.0	ASTM D1929/D2843	03/08/11	Joseph L. Doldan, P.E.
6.	ETC-11-726-24882.0	ASTM D1929/D2843	03/08/11	Joseph L. Doldan, P.E.
7.	ETC-96-191-3253.0	ASTM G26 & C158	11/05/97	Joseph L. Doldan, P.E.
8.	ETC-96-191-5523.0	ASTM G26 & C158	05/11/99	Joseph L. Doldan, P.E.

(Submitted under NOA No. 11-0325.05)

	<u>Test Report</u>	<u>Test Standard</u>	<u>Date</u>	<u>Signature</u>
9.	ETC 07-726-20120.0	ASTM D2843	07/17/08	Joseph L. Doldan, P.E.
10.	ETC 07-726-20120.0	ASTM D1929	07/17/08	Joseph L. Doldan, P.E.
11.	ETC 07-726-20120.0	ASTM D635	07/17/08	Joseph L. Doldan, P.E.
12.	ETC 07-726-20120.0	ASTM C158	07/17/08	Joseph L. Doldan, P.E.

(Submitted under NOA No. 09-0223.05)

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

1. None.



Carlos M. Utrera, P.E.
Product Control Examiner
NOA No. 26-0625.17
Expiration Date: May 21, 2031
Approval Date: August 20, 2026

NOTICE OF ACCEPTANCE: EVIDENCE PAGE

1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's (CONTINUED)

F. STATEMENTS (*Submitted under NOA No. 21-0216.01*)

1. Statement letter from manufacturer, stating no product modifications and requesting a slight change of the title of the NOA to clarify the NOA is for the interlayers and not glass, dated 02/12/21, signed and sealed by Julia Schimmelpenninck, Technical Engagement Manager – Architectural Interlayers, Eastman Chemical Company.
2. Statement letter of code conformance, complying with **FBC 6th Edition (2017)** and with **FBC 7th Edition (2020)** issued by W. W. Schaefer Engineering & Consulting, P.A., dated 06/04/20, signed and sealed by Warren W. Schaefer, P.E.
(Submitted under NOA No. 20-0622.041)
3. Statement letter of no financial interest issued by W. W. W. Schaefer Engineering & Consulting, P.A., dated 10/24/11, signed and sealed by Warren W. Schaefer, P.E.
(Submitted under NOA No. 11-1102.11)

2. EVIDENCE SUBMITTED UNDER NOA # 23-0713.18

A. DRAWINGS

1. None.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS

1. Statement letter of conformance, complying with **FBC 8th Edition (2023)** and with **FBC 7th Edition (2020)**, dated July 1, 2023, issued by W. W. Schaefer Engineering & Consulting, P.A. and signed and sealed by Warren W. Schaefer, P.E.



Carlos M. Utrera, P.E.
Product Control Examiner
NOA No. 26-0625.17
Expiration Date: May 21, 2031
Approval Date: August 20, 2026

NOTICE OF ACCEPTANCE: EVIDENCE PAGE

3. EVIDENCE SUBMITTED UNDER NOA # 25-0904.04 AND NEW

A. DRAWINGS

1. Drawing No. **1813**, titled “Saflex Based Interlayers for Laminated Glass”, sheets 1 through 3 of 3, dated 04/06/12 and last revised on 08/27/25, prepared by W.W. Schaefer Engineering & Consulting, P.A., signed and sealed by Warren W. Schaefer, P.E.

B. TESTS

	<u>Test Report</u>	<u>Test Standard</u>	<u>Date</u>	<u>Signature</u>
1.	Intertek-M9090.01-106-18 R0	ASTM D2843	01/17/22	Vinu J. Abraham, P.E.
2.	Intertek-M9090.01-106-18 R0	ASTM D1929	01/17/22	Vinu J. Abraham, P.E.
3.	Intertek-M9090.01-106-18 R0	ASTM D635	01/17/22	Vinu J. Abraham, P.E.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS


1. Statement letter of conformance, complying with **FBC 9th Edition (2026)** and with **FBC 8th Edition (2023)**, dated July 1, 2026, issued by W. W. Schaefer Engineering & Consulting, P.A. and signed and sealed by Warren W. Schaefer, P.E.
2. Statement letter of conformance, complying with **FBC 8th Edition (2023)** and no financial interest, dated 08/27/25, issued by W. W. Schaefer Engineering & Consulting, P.A. and signed and sealed by Warren W. Schaefer, P.E.
3. Statement renewal request letter for NOA # 23-0713.18 (Saflex PVB clear and color interlayer for Laminated glass) by Eastman, stating product has not changed, signed by Julia Schimmelpenningh, Technical Manager Eastman chemical.



Carlos M. Utrera, P.E.
Product Control Examiner
NOA No. 26-0625.17
Expiration Date: May 21, 2031
Approval Date: August 20, 2026

The following pages in this document were submitted by the manufacturer (third party) to represent the product being approved and establish the limits of use. The pages may include technical drawings, schematics and installation details.

A B A

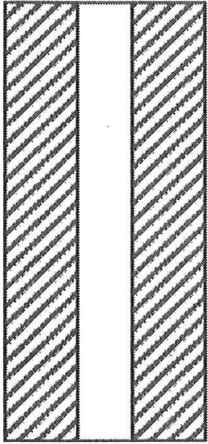

SECTION

Saflex® PVB Interlayer

(clear &/or colored Saflex @ 35% - 50%)

Product Description

Manufactured by: Eastman Chemical Company

Description: Clear or Colored monolithically extruded interlayers made of polyvinyl butyral resin and triethyleneglycol bis(2-ethyl hexanoate) plasticizer at concentrations between 35 and 50%. Interlayer is offered under the brand names of Saflex® and Vanceva® for lamination between a minimum of two glasses. A typical glazing is made of the following components (minimum thicknesses indicated – multiple plies of interlayer to be used as necessary).

A – 2.3 mm (3/32 in)	Annealed Glass
B – 0.76 mm (0.030 in)	Saflex® and/or Vanceva® interlayers

PRODUCT REVISED
as complying with the Florida
Building Code

NOA-No. 26-0625.17

Expiration Date 05/21/2031

By *[Signature]*
Miami-Dade Product Control

Product Properties

Description	Test	Saflex® @ 30% (2)
(1) Self-Ignition temperature	ASTM D1929	760°F
(1) Smoke Density	ASTM D2843	5%
(1) Rate of Burning	ASTM D635	< 25 mm mark (not reported)
(1) Time of Burning	ASTM D635	< 5 sec
(1) Extent of Burning	ASTM D635	0.31 inch
(1) Avg Mod of Rupture	ASTM C158	(1) Weathering (3) Before: 2556 psi After: 2657 psi

PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No 25-0704-04
Expiration Date 5/21/2031

- 1) Specimen: Laminated glass with Saflex® and/or Vanceva® interlayer
 - 2) Interlayer by itself (unprotected) does NOT comply with Florida Building Code
 - 3) Weathering per section 2615 of the Florida Building Code
- Saflex and Vanceva are registered trademarks of Eastman Chemical Company

By *[Signature]*
Miami Dade Product Control



08/27/25
Warren W. Schaefer, P.E.
Structural Engineer
P.E. No. 44135

D	Reviewed for FBC	07/29/20
C	Combined Multi-layer and Saflex; removed IIIG name	12/12/11
B	Renewed Flammability test data	03/21/11
A	Combined RM & IIIG Products info one document	04/02/03
Rev #	Description	Date

Eastman Chemical Company

730 Worcester Street, Springfield, MA 01151

Phone: 413-730-3413 E-mail: glazing@esatman.com

Title: **Saflex® Based Interlayers for Laminated Glass**

W.W. Schaefer Engineering & Consulting, P.A.
Structural Consulting Engineers
25601 Aysen Drive
Punta Gorda, FL 33983
Phone: 561-744-3424

Drawing Number	Sheet Number	Drawing Date	Revisions Date
1813	1 of 3	04/06/12	

Saflex® PVB interlayer continued


Saflex® Multi-layer Product Properties

Footnote	Description	Test	Dade County Criteria	Saflex Multi-layer Series (2)
(1)	Test for Smoke Density	ASTM D2843	Passed (<75%)	26.6%
(1)	Self Ignition Temperature	ASTM D1929	Passed (>550°F)	750°F
(1)	Rate of Burning	ASTM D635	Passed (C-1; ,1.0 in/min)	---
(1)	Average Time of Burning	ASTM D635	---	<5 sec.
(1)	Average Extent of Burning	ASTM D635	---	0.51 in
(1) & (3)	Average Modulus of Rupture	ASTM C158	Passed (<10.0%)	Delta: 4.9% Before: 3842 psi After: 4042 psi

- 1) Specimen: Laminated glass with Saflex® and/or Vanceva® interlayer
- 2) Interlayer by itself (unprotected) does NOT comply with Florida Building Code
- 3) Weathering per section 2615 of the Florida Building Code


Saflex® and Vanceva® Solar/Color and Colorant Properties


Material Designation	Smoke Density Rating ASTM D2843	Dade Notification #
Vanceva® & Saflex® - Clear	5%	ETC-11-726-25079.0
Vanceva® & Saflex® - White	20%	ETC-11-726-25079.0
Vanceva® & Saflex® - Black	2%	ETC-11-726-25079.0
Vanceva® & Saflex® - Blue	5%	ETC-11-726-25079.0
Vanceva® & Saflex® - Yellow	9%	ETC-11-726-25079.0
Vanceva® & Saflex® - Red	10%	ETC-11-726-25079.0

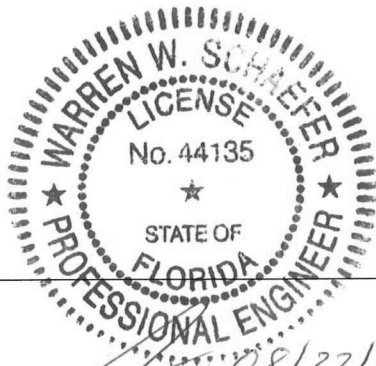

Warren W. Schaefer, P.E.
Structural Engineer
P.E. No. 44135

PRODUCT REVISED
as complying with the Florida
Building Code
NOA-No. 26-0625.17
Expiration Date 05/21/2031
By 
Miami-Dade Product Control

PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No 25-0904.04
Expiration Date 5/21/2031
By 
Miami Dade Product Control

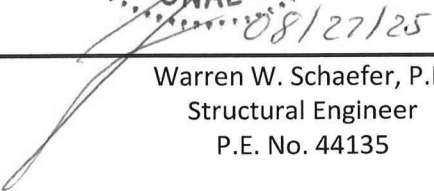 Warren W. Schaefer, P.E. Structural Engineer P.E. No. 44135	Eastman Chemical Company 730 Worcester Street, Springfield, MA 01151 Phone: 413-730-3413 E-mail: glazing@esatman.com			
	Title: Saflex® Based Interlayers for Laminated Glass			
W.W. Schaefer Engineering & Consulting, P.A. Structural Consulting Engineers 25601 Aysen Drive Punta Gorda, FL 33983 Phone: 561-744-3424	Drawing Number 1813	Sheet Number 2 of 3	Drawing Date 04/06/12	Revisions Date

Saflex® PVB interlayer continued

Saflex® interlayers are known as Saflex, Saflex colors, Saflex Multi-layer, SilentGlass Technology™ and Vanceva® Color

Vanceva and/or Saflex are known as: AR, CL, DA through DZ, MG, NA, RA through RZ, SA through SZ and VA through VS. (e.g.: RB41, NA71).


Saflex® Multi-layer interlayers are known as: Q series (QA through QZ) and Silent Glass Technology (e.g.: QB51, QS41 etc.)


® Saflex and Vanceva are registered trademarks of Eastman Chemical Company

™Silent glass Technology is a trademark of Eastman Chemical Company

This is a component approval and does not include an evaluation of structural performance of this component. Systems incorporating this component shall apply for an NOA to the Miami-Dade Product Control and shall submit test reports and other required documents showing that the systems using this component will resist the loads according to chapter 16 of the F.B.C. A list of authorized laminators shall be filed with Miami-Dade County by Eastman Chemical Company.

PRODUCT REVISED
as complying with the Florida
Building Code
NOA-No. 26-0625.17
Expiration Date 05/21/2031
By 
Miami-Dade Product Control

PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No 25-0904.04
Expiration Date 5/21/2031
By 
Miami Dade Product Control

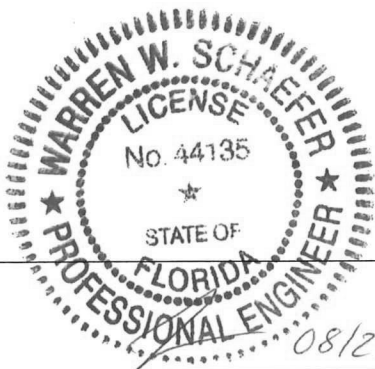

Warren W. Schaefer, P.E.
Structural Engineer
P.E. No. 44135

Eastman Chemical Company

730 Worcester Street, Springfield, MA 01151

Phone: 413-730-3413 E-mail: glazing@esatman.com

Title: **Saflex® Based Interlayers for Laminated Glass**

W.W. Schaefer Engineering & Consulting, P.A.
Structural Consulting Engineers
25601 Aysen Drive
Punta Gorda, FL 33983
Phone: 561-744-3424

Drawing
Number

1813

Sheet
Number

3 of 3

Drawing Date

04/06/12

Revisions
Date